



MAXX COLD MAXX ICE

ICONIC BRANDS, LEADING INNOVATION

Refrigerators | Freezers | Merchandisers | Ice Machines



| | |
|--|----|
| REACH-IN REFRIGERATORS & FREEZERS | 3 |
| MERCHANDISERS | 10 |
| UNDERCOUNTER REFRIGERATORS & FREEZERS | 23 |
| CHEST FREEZERS | 26 |
| ICE CREAM DIPPING CABINETS & DISPLAY FREEZERS | 29 |
| SANDWICH/SALAD, MEGATOP & PIZZA PREP TABLES | 33 |
| CHEF BASES | 39 |
| MILK COOLERS | 41 |
| BOTTLE COOLERS & BEER TOWER DISPENSERS | 43 |
| SELF-CONTAINED & MODULAR ICE MACHINES | 47 |
| INTELLIGENT SERIES SELF-CONTAINED & MODULAR ICE MACHINES | 51 |
| MARINE ICE MACHINES | 54 |
| ICE STORAGE BINS | 56 |
| BIN COMPATIBILITY | 58 |
| WATER FILTERS | 58 |
| COMPACT REFRIGERATION | 59 |
| WINE COOLERS & BEVERAGE CENTERS | 61 |

| | | | |
|---------------------------|--|--|--|
| Exterior Construction | Stainless Steel | Stainless Steel | Stainless Steel |
| Interior Construction | Stainless Steel | Aluminum | Aluminum |
| Available Door Types | Solid Door Stainless Steel | Solid Door Stainless Steel & Glass Door | Solid Door Stainless Steel & Glass Door |
| Door Handle | Recessed Black Plastic Handles | Recessed Black Plastic Handles | Formed Full Length Handles |
| Compressor Mounting | Top & Bottom Mount | Top Mount | Bottom Mount |
| Interior Lighting | LED Lighting | LED Lighting | LED Lighting |
| Maximum Height | 82.25" | 82.75" | 79.7" |
| Digital Control / Display | LED Display | LED Display | LED Display |
| Shelving | PE Coated Wire Shelves (3 per section / door) | PE Coated Wire Shelves (3 per section / door) | PE Coated Wire Shelves (3 per section / door) |
| Casters | 5" Swivel Casters | 4" Swivel Casters | 4" Swivel Casters |
| Security | Lock & Key Set | Lock & Key Set | Lock & Key Set |
| International Electrical* | Units available in 220V/50-60Hz/1Ph | Units available in 220V/50-60Hz/1Ph | Units available in 220V/50-60Hz/1Ph |
| Certifications | ETL Tested to NSF & UL Standards, Energy Star | ETL Tested to NSF & UL Standards, Energy Star | ETL Tested to NSF & UL Standards, Energy Star |
| Value | Premium | Classic Value | Economy |

*Please specify when ordering if international electrical requirements are needed.

FULL Dice Cube hard, full dice shape

Models - MIM50 SERIES, MIM150N, MIM200N, MIM260N, MIM320N, MIM120, MIM250, MIM452, MIM600, MIM1000, MIM360N, MIM370N, MIM500N, MIM650N, MIM1000N




Half Dice Cube hard, half dice shape

Models - MIM85H, MIM125H, MIM265H, MIM150NH, MIM200NH, MIM260NH, MIM320NH, MIM360NH, MIM370NH, MIM500NH, MIM650NH, MIM1000NH



LONG CRESCENT Cube hard, crescent shape

Models - MMAR25 SERIES

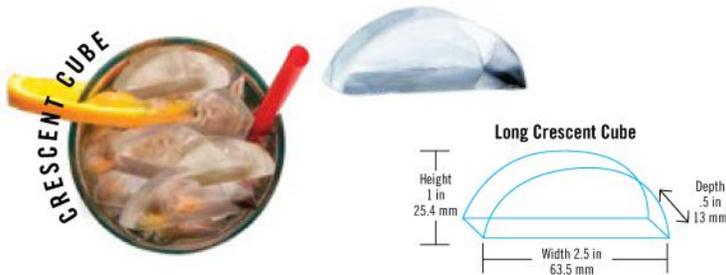

BULLET Cube hard, bullet shape

Models - MIM75, MIM100, MIM130



ICE USAGE APPLICATIONS ICE NEEDS PER DAY

Food Service

| | |
|------------------|-----------------------------|
| Restaurant..... | 1 ½ to 2 lbs. per person |
| Cocktail..... | 3 to 5 lbs. per person/seat |
| Water Glass..... | 4 oz. per 10 oz. glass |
| Salad Bar..... | 30 lbs. per cubic foot |
| Fast Food..... | 5 oz. per 7-10 oz. drink |
| | 8 oz. per 12-16 oz. drink |
| | 12 oz. per 18-24 oz. drink |

Hospitality

| | |
|-----------------|-------------------------------|
| Guest Ice..... | 5 lbs. per room |
| Restaurant..... | 1 ½ to 2 lbs. per person/seat |
| Cocktail..... | 3 to 5 lbs. per person/seat |
| Catering..... | 1 lb. per person |

Convenience Store

| | |
|---------------|-------------------------------|
| Beverage..... | 5 to 6 oz. per 12 oz. drink |
| | 8 to 10 oz. per 20 oz. drink |
| | 12 to 16 oz. per 32 oz. drink |

Entertainment

| | |
|-----------------|-------------------------------|
| Restaurant..... | 1 ½ to 2 lbs. per person/seat |
| Cocktail..... | 3 to 5 lbs. per person/seat |

Healthcare

| | |
|---------------|-------------------|
| Bed..... | 6 lbs. per bed |
| Employee..... | 2 lbs. per person |



 **MAXX COLD**

 **MAXX COLD**
X-series

 **MAXX COLD**
SELECTSERIES

REFRIGERATORS & FREEZERS

Maxx Cold offers a robust line of refrigeration options to meet any budget or application. Choose from an array of refrigerators and freezers including 1, 2 and 3 door upright units featuring stainless steel, glass doors in either top or bottom mount designs. Undercounter models, as well as solid and glass-top Chest Freezers are also available.

BOTTOM-MOUNT REACH-IN REFRIGERATORS & FREEZERS



MCR-23FDHC
MCF-23FDHC
26.75"W x 31"D x 82.75"H



MCR-49FDHC
MCF-49FDHC
54"W x 31"D x 82.75"H



MCR-72FDHC
MCF-72FDHC
81"W x 31"D x 82.75"H

Refrigerators:

- MCR-23FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MCR-49FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MCR-72FDHC** - Upright reach-in refrigerator; stainless steel exterior

Freezers:

- MCF-23FDHC** - Upright reach-in freezer; stainless steel exterior
- MCF-49FDHC** - Upright reach-in freezer; stainless steel exterior
- MCF-72FDHC** - Upright reach-in freezer; stainless steel exterior

All Models Feature:

- Self-closing door(s) with easy to grip recessed handle(s)
- Automatic interior lighting
- Lock and key set for security
- Equipped with four (4) or six (6) 5" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for five minutes
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency




| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | HP | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|------------|--|---|------------------------|-----------------------------------|----------|-----|---------------------|-----------------------------|-----------------|-------------------|
| MCR-23FDHC | 26.75" x 31" x 82.75" (680 x 787 x 2102 mm) | 22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm) | 18.9 Cu Ft (535 L) | 33°F to 41°F (1°C to 5°C) | 2.0A | 1/4 | 271 lbs (123 kg) | R-290a 2.53 oz (72 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MCR-49FDHC | 54" x 31" x 82.75" (1372 x 787 x 2102 mm) | 49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm) | 42.8 Cu Ft (1212 L) | 33°F to 41°F (1°C to 5°C) | 2.4A | 1/4 | 397 lbs (180 kg) | R-290a 3.46 oz (98 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MCR-72FDHC | 81" x 31" x 82.75" (2057 x 787 x 2102 mm) | 77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm) | 66.7 Cu Ft (1889 L) | 33°F to 41°F (1°C to 5°C) | 5.5A | 1/2 | 634 lbs (287 kg) | R-290a 5.22 oz (148 g) | 3 / 9 | 115V / 60Hz / 1Ph |
| MCF-23FDHC | 26.75" x 31" x 82.75" (680 x 787 x 2102 mm) | 22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm) | 18.9 Cu Ft (535 L) | -10°F to 10°F (-23°C to -12°C) | 5.6A | 1/2 | 284 lbs (129 kg) | R-290a 2.33 oz (66 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MCF-49FDHC | 54" x 31" x 82.75" (1372 x 787 x 2102 mm) | 49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm) | 42.8 Cu Ft (1212 L) | -10°F to 10°F (-23°C to -12°C) | 4.6A | 1/2 | 403 lbs (183 kg) | R-290a 4.44 oz (126 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MCF-72FDHC | 81" x 31" x 82.75" (2057 x 787 x 2102 mm) | 77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm) | 66.7 Cu Ft (1889 L) | -10°F to 10°F (-23°C to -12°C) | 9.9A | 1 | 650 lbs (295 kg) | R-290a 5.08 oz (144 g) | 3 / 9 | 220V / 60Hz / 1Ph |



MCRT-23FDHC
MCFT-23FDHC
26.75"W x 31"D x 82.75"H



MCRT-49FDHC
MCFT-49FDHC
54"W x 31"D x 82.75"H

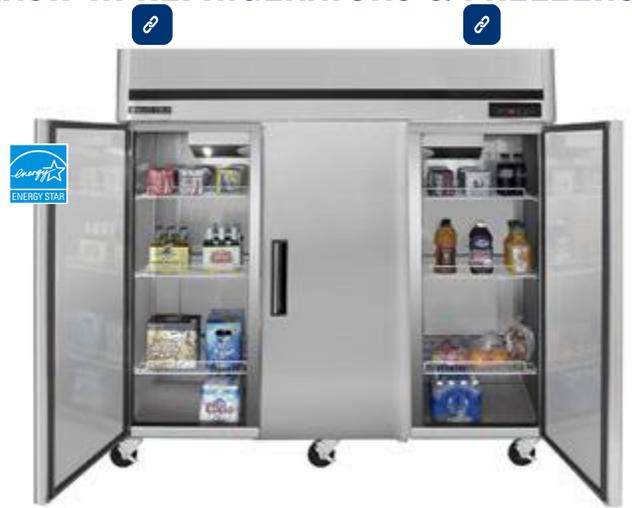

MCRT-72FDHC
MCFT-72FDHC
81"W x 31"D x 82.75"H

Refrigerators:

- MCRT-23FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MCRT-49FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MCRT-72FDHC*** - Upright reach-in refrigerator; stainless steel exterior

Freezers:

- MCFT-23FDHC** - Upright reach-in freezer; stainless steel exterior
- MCFT-49FDHC** - Upright reach-in freezer; stainless steel exterior
- MCFT-72FDHC** - Upright reach-in freezer; stainless steel exterior

All Models Feature:

- Self-closing door(s) with easy to grip recessed handle(s)
- Automatic interior lighting
- Lock and key set for security
- Supplied with four (4) or six (6) 5" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for five minutes
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency



*MCRT-72FDHC not Energy Star Listed

| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | HP | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|------------------------|-----------------------------------|----------|-----|---------------------|-----------------------------|-----------------|-------------------|
| MCRT-23FDHC | 27" x 31" x 82" (681 x 787 x 2078 mm) | 22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm) | 18.9 Cu Ft (535 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 1/4 | 264 lbs (120 kg) | R-290a 2.61 oz (74 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MCRT-49FDHC | 54" x 31" x 82" (1370 x 787 x 2078 mm) | 49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm) | 42.8 Cu Ft (1212 L) | 33°F to 41°F (1°C to 5°C) | 3.2A | 1/4 | 388 lbs (190 kg) | R-290a 3.67 oz (104 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MCRT-72FDHC | 81" x 31" x 82" (2060 x 787 x 2078 mm) | 77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm) | 66.7 Cu Ft (1889 L) | 33°F to 41°F (1°C to 5°C) | 6.3A | 1/2 | 567 lbs (257 kg) | R-290a 5.22 oz (148 g) | 3 / 9 | 115V / 60Hz / 1Ph |
| MCFT-23FDHC | 27" x 31" x 82" (681 x 787 x 2078 mm) | 22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm) | 18.9 Cu Ft (535 L) | -10°F to 10°F (-23°C to -12°C) | 4.9A | 1/4 | 273 lbs (124 kg) | R-290a 2.82 oz (80 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MCFT-49FDHC | 54" x 31" x 82" (1370 x 787 x 2078 mm) | 49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm) | 42.8 Cu Ft (1212 L) | -10°F to 10°F (-23°C to -12°C) | 6.8A | 1/4 | 418 lbs (190 kg) | R-290a 4.44 oz (126 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MCFT-72FDHC | 81" x 31" x 82" (2060 x 787 x 2078 mm) | 77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm) | 66.7 Cu Ft (1889 L) | -10°F to 10°F (-23°C to -12°C) | 8.4A | 1/2 | 595 lbs (270 kg) | R-290a 5.22 oz (148 g) | 3 / 9 | 220V / 60Hz / 1Ph |

TOP-MOUNT REACH-IN REFRIGERATORS & FREEZERS



MXCR-19FDHC
MXCF-19FDHC

26.75"W x 31.5"D x 77.6"H

MXCR-23FDHC
MXCF-23FDHC

26.75"W x 32.7"D x 82.25"H

MXCR-49FDHC
MXCF-49FDHC

54"W x 32.7"D x 82.25"H

MXCR-72FDHC
MXCF-72FDHC

81"W x 32.7"D x 82.25"H

Refrigerators:

- MXCR-19FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MXCR-23FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MXCR-49FDHC** - Upright reach-in refrigerator; stainless steel exterior
- MXCR-72FDHC** - Upright reach-in refrigerator; stainless steel exterior

Freezers:

- MXCF-19FDHC** - Upright reach-in freezer; stainless steel exterior
- MXCF-23FDHC** - Upright reach-in freezer; stainless steel exterior
- MXCF-49FDHC** - Upright reach-in freezer; stainless steel exterior
- MXCF-72FDHC** - Upright reach-in freezer; stainless steel exterior

All Models Feature:

- Self-closing door(s) with easy to grip recessed handle(s)
- Field reversible door (single door models only)
- Automatic interior lighting
- Lock and key set for security
- Equipped with four (4) or six (6) 5" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for three minutes
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|--|---|----------------------|-----------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXCR-19FDHC | 25.2" x 31.5" x 77.6" (640 x 800 x 1970 mm) | 20.25" x 28.7" x 61.8" (514 x 730 x 1570 mm) | 19 Cu Ft (538 L) | 34°F to 41°F (1°C to 5°C) | 3A | 291 lbs (132 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXCR-23FDHC | 26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm) | 21.9" x 26.5" x 52.1" (556 x 673 x 1324 mm) | 23 Cu Ft (651 L) | 34°F to 41°F (1°C to 5°C) | 3A | 311 lbs (143 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXCR-49FDHC | 53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm) | 49.1" x 26.5" x 52.1" (1246 x 673 x 1324 mm) | 49 Cu Ft (1387 L) | 34°F to 41°F (1°C to 5°C) | 4.5A | 536 lbs (244 kg) | R-290A 3.7 oz (105 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MXCR-72FDHC | 81" x 32.7" x 82.25" (2057 x 831 x 2090 mm) | 76.1" x 26.5" x 52.1" (1933 x 673 x 1324 mm) | 72 Cu Ft (2039 L) | 34°F to 41°F (1°C to 5°C) | 7A | 639 lbs (291 kg) | R-290A 5.29 oz (150 g) | 3 / 9 | 220V / 60Hz / 1Ph |
| MXCF-19FDHC | 25.2" x 31.5" x 77.6" (640 x 800 x 1970 mm) | 20.25" x 28.7" x 61.8" (514 x 730 x 1570 mm) | 19 Cu Ft (538 L) | -10°F to 10°F (-23°C to -12°C) | 8A | 296 lbs (134 kg) | R-290A 3.88 oz (110 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXCF-23FDHC | 26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm) | 21.9" x 26.5" x 52.1" (556 x 673 x 1324 mm) | 23 Cu Ft (651 L) | -10°F to 10°F (-23°C to -12°C) | 8A | 336 lbs (140 kg) | R-290A 3.88 oz (110 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXCF-49FDHC | 53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm) | 49.1" x 26.5" x 52.1" (1246 x 673 x 1324 mm) | 49 Cu Ft (1387 L) | -10°F to 10°F (-23°C to -12°C) | 9A | 502 lbs (160 kg) | R-290A 5.29oz (150 g) | 2 / 6 | 115V / 60Hz / 1Ph |
| MXCF-72FDHC | 81" x 32.7" x 82.25" (2057 x 831 x 2090 mm) | 76.1" x 26.5" x 52.1" (1933 x 673 x 1324 mm) | 72 Cu Ft (2039 L) | -10°F to 10°F (-23°C to -12°C) | 9A | 601 lbs (195 kg) | R-290A 5.29oz (150 g) | 3 / 9 | 230V / 60Hz / 1Ph |



MXCR-23GDHC
26.8"W x 31.9"D x 82.3"H



MXCR-49GDHC
53.9"W x 31.9"D x 82.3"H

Models:

MXCR-23GDHC - Glass door reach-in refrigerator; stainless steel exterior

MXCR-49GDHC - Glass door reach-in refrigerator; stainless steel exterior

All Models Feature:

- Durable, easy to clean stainless steel exterior and interior
- Self-closing, locking, dual-pane glass doors with easy to grip handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with four 4" swivel casters (2 with brakes)
- Digital control system
- LED interior lighting & temperature display
- Automatic defrost system
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|----------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXCR-23GDHC | 26.8" x 31.9" x 82.3" (681 x 810 x 2090 mm) | 22.2" x 27.6" x 50.2" (564 x 700 x 1276 mm) | 23 Cu Ft (651 L) | 34°F to 41°F (1°C to 5°C) | 3A | 366 lbs (166 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXCR-49GDHC | 53.9" x 31.9" x 82.3" (1369 x 810 x 2090 mm) | 49.4" x 27.6" x 50.2" (1254 x 700 x 1276 mm) | 49 Cu Ft (1387 L) | 34°F to 41°F (1°C to 5°C) | 4.5A | 597 lbs (272 kg) | R-290A 3.7 oz (105 g) | 2 / 6 | 115V / 60Hz / 1Ph |

REACH-IN REFRIGERATORS & FREEZERS



MXR-23RHC
30.6"W x 29"D x 78"H



MXR-23FHC
30.6"W x 29"D x 78"H

Refrigerator:

MXR-23RHC - Economy reach-in refrigerator; painted steel exterior

Freezer:

MXR-23FHC - Economy reach-in freezer; painted steel exterior

All Models Feature:

- Easy to clean, low maintenance white painted steel exterior and white painted aluminum interior
- Field-reversible hinged door with heavy-duty recessed full-length handle
- Door lock & key set for security
- Three (3) adjustable wire shelves, one (1) fixed half shelf
- Equipped with 2.5" swivel casters (2 with brakes)
- Digital control system
- LED temperature display
- Automatic defrost system
- Door frame heaters
- Easy to clean/replace removable snap-in gaskets
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Front-breathing bottom-mounted condensing unit
- Urethane foam insulated walls
- Not equipped with interior lighting



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-----------|--|--|---------------------|-----------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXR-23RHC | 30.6" x 29" x 78" (777 x 737 x 1981 mm) | 26.3" x 21.6" x 58.9" (668 x 549 x 1496 mm) | 23 Cu Ft (651 L) | 34°F to 41°F (1°C to 5°C) | 3.0A | 264 lbs (120 kg) | R-290A 3.35 oz (95 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXR-23FHC | 30.6" x 29" x 78" (777 x 737 x 1981 mm) | 26.3" x 21.6" x 58.9" (668 x 549 x 1496 mm) | 23 Cu Ft (651 L) | -10°F to 10°F (-23°C to -12°C) | 7.0A | 286 lbs (130 kg) | R-290A 4.23oz (120 g) | 1 / 3 | 115V / 60Hz / 1Ph |



MXSR-23FDHC
MXSF-23FDHC
27"W x 32.5"D x 79.7"H



MXSR-49FDHC
MXSF-49FDHC
54.1"W x 32.5"D x 79.7"H



MXSR-23GDHC
27"W x 32.5"D x 79.7"H



MXSR-49GDHC
54.1"W x 32.5"D x 79.7"H

Solid Door Models:

Refrigerators:

MXSR-23FDHC - Upright reach-in refrigerator; stainless steel exterior

MXSR-49FDHC - Upright reach-in refrigerator; stainless steel exterior

Freezers:

MXSF-23FDHC - Upright reach-in freezer; stainless steel exterior

MXSF-49FDHC - Upright reach-in freezer; stainless steel exterior

Glass Door Models:

MXSR-23GDHC - Glass door reach-in refrigerator; stainless steel exterior

MXSR-49GDHC - Glass door reach-in refrigerator; stainless steel exterior

All Models Feature:

- Stainless Steel Exterior
- Solid Door Interior: Painted Aluminum
- Glass Door Interior: Stainless Steel
- Interior lighting controlled by an automatic on-off door switch
- Field reversible door (single door models only)
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Equipped with door locks and 4" diameter swivel casters (2 with brakes)

- Self-contained, digitally-controlled heavy-duty refrigeration system - forced air for even temperature regulation
- Automatic defrost system
- Self-closing doors with heavy-duty hinges that open to 180°
- Heavy-duty corrosion-resistant shelves and adjustable mounting clips
- Open door alert beeps when door has been open for 3 minutes
- Easy to full-length formed handles



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|------------------------|-----------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXSR-23FDHC | 27" x 32.5" x 79.7" (686 x 825 x 2025 mm) | 22.3" x 26.8" x 55" (566 x 680 x 1397 mm) | 19.3 Cu Ft (547 L) | 33°F to 41°F (1°C to 5°C) | 2.8A | 300 lbs (136 kg) | R-290a | 1 / 3 | 115V / 60Hz / 1Ph |
| MXSR-49FDHC | 54.1" x 32.5" x 79.7" (1372 x 825 x 2025 mm) | 49.3" x 26.8" x 55" (1252 x 680 x 1397 mm) | 42.9 Cu Ft (1215 L) | 33°F to 41°F (1°C to 5°C) | 6.25A | 430 lbs (195 kg) | R-290a | 2 / 6 | 115V / 60Hz / 1Ph |
| MXSF-23FDHC | 27" x 32.5" x 79.7" (686 x 825 x 2025 mm) | 22.3" x 26.8" x 55" (566 x 680 x 1397 mm) | 19.3 Cu Ft (547 L) | -10°F to 10°F (-24°C to -12°C) | 6A | 310 lbs (141 kg) | R-290a | 1 / 3 | 115V / 60Hz / 1Ph |
| MXSF-49FDHC | 54.1" x 32.5" x 79.7" (1372 x 825 x 2025 mm) | 49.3" x 26.8" x 55" (1252 x 680 x 1397 mm) | 42.9 Cu Ft (1215 L) | -10°F to 10°F (-24°C to -12°C) | 9A | 460 lbs (209 kg) | R-290a | 2 / 6 | 115V / 60Hz / 1Ph |
| MXSR-23GDHC | 27" x 32.5" x 79.7" (686 x 825 x 2025 mm) | 22.3" x 26.8" x 55" (566 x 680 x 1397 mm) | 19.3 Cu Ft (547 L) | 33°F to 41°F (1°C to 5°C) | 2.8A | 280 lbs (127 kg) | R-290a | 1 / 3 | 115V / 60Hz / 1Ph |
| MXSR-48GDHC | 54.1" x 32.5" x 79.7" (1372 x 825 x 2025 mm) | 49.3" x 26.8" x 55" (1252 x 680 x 1397 mm) | 42.9 Cu Ft (1215 L) | 33°F to 41°F (1°C to 5°C) | 6.25A | 440 lbs (200 kg) | R-290a | 2 / 6 | 115V / 60Hz / 1Ph |



MAXX COLD *X-series*

MERCHANDISERS

Showcase your cold beverages, food products and grab and go items with Maxx Cold Merchandisers. Our glass door Merchandisers provide excellent product visibility to help boost impulse sales, keep product at the right temperature and are energy efficient.



MXM1-12RHC
25"W x 26"D x 62"H



MXM1-12RBHC
25"W x 26"D x 62"H



MXM1-16RHC
25"W x 26"D x 74.5"H



MXM1-16RBHC
25"W x 26"D x 74.5"H



MXM1-23RHC
27"W x 32"D x 79.5"H



MXM1-23RBHC
27"W x 32"D x 79.5"H

Models:

MXM1-12RHC - Reach-in refrigerator; white coated steel exterior

MXM1-12RBHC - Reach-in refrigerator; black coated steel exterior

MXM1-16RHC - Reach-in refrigerator; white coated steel exterior

MXM1-16RBHC - Reach-in refrigerator; black coated steel exterior

MXM1-23RHC - Reach-in refrigerator; white coated steel exterior

MXM1-23RBHC - Reach-in refrigerator; black coated steel exterior

All Models Feature:

- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Double pane insulated glass door
- Interior LED lighting
- Bottom mounted compressor
- Equipped with three (3) or four (4) adjustable heavy-duty PE-coated wire shelves
- Supplied with four (4) low profile (1.125" x 1.625") rollers (2 with leveling feet)
- Digital controls with LED temperature display
- Automatic defrost system
- Provided with lock and key set for security
- Illuminated top panel for advertising/promoting products
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|--|---|---------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXM1-12RHC | 25" x 26" x 62" (635 x 660 x 1575 mm) | 20.25" x 20.5" x 23.5" (514 x 520 x 596 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 221 lbs (100 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-12RBHC | 25" x 26" x 62" (635 x 660 x 1575 mm) | 20.25" x 20.5" x 23.5" (514 x 520 x 596 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 221 lbs (100 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-16RHC | 25" x 26" x 74.5" (635 x 660 x 1900 mm) | 20.25" x 20.5" x 49.125" (514 x 520 x 1248 mm) | 16 Cu Ft (453 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 243 lbs (110 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-16RBHC | 25" x 26" x 74.5" (635 x 660 x 1900 mm) | 20.25" x 20.5" x 49.125" (514 x 520 x 1248 mm) | 16 Cu Ft (453 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 243 lbs (110 kg) | R-290A 3.0 oz (85 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-23RHC | 27" x 32" x 79.5" (686 x 810 x 2019 mm) | 26.5" x 22" x 52.25" (673 x 559 x 1327 mm) | 23 Cu Ft (651 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 325 lbs (148 kg) | R-290A 3.0 oz (85 g) | 1 / 4 | 115V / 60Hz / 1Ph |
| MXM1-23RBHC | 27" x 32" x 79.5" (686 x 810 x 2019 mm) | 26.5" x 22" x 52.25" (673 x 559 x 1327 mm) | 23 Cu Ft (651 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 325 lbs (148 kg) | R-290A 3.0 oz (85 g) | 1 / 4 | 115V / 60Hz / 1Ph |

UPRIGHT MERCHANDISER REFRIGERATORS



MXM2-48RHC
54"W x 32"D x 79.5"H



MXM2-48RBHC
54"W x 32"D x 79.5"H



MXM3-72RHC
81"W x 32"D x 79.5"H



MXM3-72RBHC
81"W x 32"D x 79.5"H

Models:

MXM2-48RHC - Reach-in refrigerator; white coated steel exterior

MXM2-48RBHC - Reach-in refrigerator; black coated steel exterior

MXM3-72RHC - Reach-in refrigerator; white coated steel exterior

MXM3-72RBHC - Reach-in refrigerator; black coated steel exterior

All Models Feature:

- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Double pane insulated glass door
- Interior LED lighting
- Bottom mounted compressor
- Equipped with eight (8) or twelve (12) adjustable heavy-duty PE-coated wire shelves
- Supplied with four (4) or six (6) low profile (1.125" x 1.625") rollers (2 or 3 with leveling feet)
- Digital controls with LED temperature display
- Automatic defrost system
- Provided with lock and key set for security
- Illuminated top panel for advertising/promoting products
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|----------------------|------------------------------|----------|---------------------|-----------------------------|-------------------------|-------------------|
| MXM2-48RHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 490 lbs (223 kg) | R-290A 3.7 oz (105 g) | 2 Swing / 8 Shelves | 115V / 60Hz / 1Ph |
| MXM2-48RBHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 490 lbs (223 kg) | R-290A 3.7 oz (105 g) | 2 Swing / 8 Shelves | 115V / 60Hz / 1Ph |
| MXM3-72RHC | 81" x 32" x 79.5" (2057 x 810 x 2019 mm) | 72.25" x 26.5" x 52.25" (1835 x 673 x 1327 mm) | 72 Cu Ft (2039 L) | 33°F to 41°F (1°C to 5°C) | 7.0A | 670 lbs (305 kg) | R-290A 5.29 oz (150 g) | 3 Swing / 12 Shelves | 115V / 60Hz / 1Ph |
| MXM3-72RBHC | 81" x 32" x 79.5" (2057 x 810 x 2019 mm) | 72.25" x 26.5" x 52.25" (1835 x 673 x 1327 mm) | 72 Cu Ft (2039 L) | 33°F to 41°F (1°C to 5°C) | 7.0A | 670 lbs (305 kg) | R-290A 5.29 oz (150 g) | 3 Swing / 12 Shelves | 115V / 60Hz / 1Ph |



MXM2-48RSHC
54"W x 32"D x 79.5"H



MXM2-48RSBHC
54"W x 32"D x 79.5"H

Models:

MXM2-48RSHC - Reach-in sliding door refrigerator; white coated steel exterior

MXM2-48RSBHC - Reach-in sliding door refrigerator; black coated steel exterior

All Models Feature:

- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Double pane insulated glass door
- Interior LED lighting
- Bottom mounted compressor
- Supplied with eight (8) adjustable heavy-duty PE-coated wire shelves
- Equipped with four (4) low profile (1.125" x 1.625") rollers (2 with leveling feet)
- Digital controls with LED temperature display
- Automatic defrost system
- Provided with lock and key set for security
- Illuminated top panel for advertising/promoting products
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|--------------|---|---|----------------------|------------------------------|----------|---------------------|-----------------------------|--------------------------|-------------------|
| MXM2-48RSHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 490 lbs (223 kg) | R-290A 3.7 oz (105 g) | 2 Sliding / 8 Shelves | 115V / 60Hz / 1Ph |
| MXM2-48RSBHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 490 lbs (223 kg) | R-290A 3.7 oz (105 g) | 2 Sliding / 8 Shelves | 115V / 60Hz / 1Ph |



MXM1-12FHC
25"W x 26"D x 62"H



MXM1-12FBHC
25"W x 26"D x 62"H



MXM1-16FHC
25"W x 26"D x 74.5"H



MXM1-16FBHC
25"W x 26"D x 74.5"H



MXM1-23FHC
27"W x 32"D x 79.5"H



MXM1-23FBHC
27"W x 32"D x 79.5"H

Models:

MXM1-12FHC - Reach-in freezer; white coated steel exterior

MXM1-12FBHC - Reach-in freezer; black coated steel exterior

MXM1-16FHC - Reach-in freezer; white coated steel exterior

MXM1-16FBHC - Reach-in freezer; black coated steel exterior

MXM1-23FHC - Reach-in freezer; white coated steel exterior

MXM1-23FBHC - Reach-in freezer; black coated steel exterior

All Models Feature:

- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Triple pane heated & insulated glass door
- Interior LED lighting
- Bottom mounted compressor
- Equipped with three (3) or four (4) adjustable heavy-duty PE-coated wire shelves
- Supplied with four (4) low profile (1.125" x 1.625") rollers (2 with leveling feet)
- Digital controls with LED temperature display
- Automatic defrost system
- Provided with lock and key set for security
- Illuminated top panel for advertising/promoting products
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|--|---|---------------------|---------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXM1-12FHC | 25" x 26" x 62" (635 x 660 x 1575 mm) | 20.25" x 20.5" x 23.5" (514 x 520 x 596 mm) | 12 Cu Ft (340 L) | 0°F to 10°F (-18°C to -12°C) | 5.0A | 221 lbs (100 kg) | R-290A 3.7 oz (105 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-12FBHC | 25" x 26" x 62" (635 x 660 x 1575 mm) | 20.25" x 20.5" x 23.5" (514 x 520 x 596 mm) | 12 Cu Ft (340 L) | 0°F to 10°F (-18°C to -12°C) | 5.0A | 221 lbs (100 kg) | R-290A 3.7 oz (105 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-16FHC | 25" x 26" x 74.5" (635 x 660 x 1900 mm) | 20.25" x 20.5" x 49.125" (514 x 520 x 1248 mm) | 16 Cu Ft (453 L) | 0°F to 10°F (-18°C to -12°C) | 5.0A | 243 lbs (110 kg) | R-290A 3.7 oz (105 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-16FBHC | 25" x 26" x 74.5" (635 x 660 x 1900 mm) | 20.25" x 20.5" x 49.125" (514 x 520 x 1248 mm) | 16 Cu Ft (453 L) | 0°F to 10°F (-18°C to -12°C) | 5.0A | 243 lbs (110 kg) | R-290A 3.7 oz (105 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-23FHC | 27" x 32" x 79.5" (686 x 810 x 2019 mm) | 26.5" x 22" x 52.25" (673 x 559 x 1327 mm) | 23 Cu Ft (651 L) | 0°F to 10°F (-18°C to -12°C) | 8.0A | 325 lbs (148 kg) | R-290A 3.88 oz (110 g) | 1 / 4 | 115V / 60Hz / 1Ph |
| MXM1-23FBHC | 27" x 32" x 79.5" (686 x 810 x 2019 mm) | 26.5" x 22" x 52.25" (673 x 559 x 1327 mm) | 23 Cu Ft (651 L) | 0°F to 10°F (-18°C to -12°C) | 8.0A | 325 lbs (148 kg) | R-290A 3.88 oz (110 g) | 1 / 4 | 115V / 60Hz / 1Ph |



MXM2-48FHC
54"W x 32"D x 79.5"H



MXM2-48FBHC
54"W x 32"D x 79.5"H



MXM3-72FHC
81"W x 32"D x 79.5"H



MXM3-72FBHC
81"W x 32"D x 79.5"H

Models:

MXM2-48FHC - Reach-in freezer; white coated steel exterior

MXM2-48FBHC - Reach-in freezer; black coated steel exterior

MXM3-72FHC - Reach-in freezer; white coated steel exterior

MXM3-72FBHC - Reach-in freezer; black coated steel exterior

All Models Feature:

- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Triple pane, heated, insulated self-closing glass doors
- Interior LED lighting
- Bottom mounted compressor
- Equipped with eight (8) or twelve (12) adjustable heavy-duty PE-coated wire shelves
- Supplied with four (4) or six (6) low profile (1.125" x 1.625") rollers (2 or 3 with leveling feet)
- Digital controls with LED temperature display
- Automatic defrost system
- Provided with lock and key set for security
- Illuminated top panel for advertising/promoting products
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|----------------------|---------------------------------|----------|---------------------|-----------------------------|-------------------------|-------------------|
| MXM2-48FHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 0°F to 10°F (-18°C to -12°C) | 6.5A | 490 lbs (223 kg) | R-290A 5.29 oz (167 g) | 2 Swing / 8 Shelves | 115V / 60Hz / 1Ph |
| MXM2-48FBHC | 54" x 32" x 79.5" (1372 x 810 x 2019 mm) | 49.25" x 26.5" x 52.25" (1251 x 673 x 1327 mm) | 48 Cu Ft (1359 L) | 0°F to 10°F (-18°C to -12°C) | 6.5A | 490 lbs (223 kg) | R-290A 5.29 oz (167 g) | 2 Swing / 8 Shelves | 115V / 60Hz / 1Ph |
| MXM3-72FHC | 81" x 32" x 79.5" (2057 x 810 x 2019 mm) | 72.25" x 26.5" x 52.25" (1835 x 673 x 1327 mm) | 72 Cu Ft (2039 L) | 0°F to 10°F (-18°C to -12°C) | 9.0A | 670 lbs (305 kg) | R-290A 5.29 oz (150 g) | 3 Swing / 12 Shelves | 115V / 60Hz / 1Ph |
| MXM3-72FBHC | 81" x 32" x 79.5" (2057 x 810 x 2019 mm) | 72.25" x 26.5" x 52.25" (1835 x 673 x 1327 mm) | 72 Cu Ft (2039 L) | 0°F to 10°F (-18°C to -12°C) | 9.0A | 670 lbs (305 kg) | R-290A 5.29 oz (150 g) | 3 Swing / 12 Shelves | 115V / 60Hz / 1Ph |



MXM2-36RHC
39.5"W x 33.5"D x 79.5"H



MXM2-36RBHC
39.5"W x 33.5"D x 79.5"H



MXM2-36RSHC
39.5"W x 33.5"D x 79.5"H



MXM2-36RSBHC
39.5"W x 33.5"D x 79.5"H

Models:

MXM2-36RHC - Reach-in refrigerator; white coated steel exterior

MXM2-36RBHC - Reach-in refrigerator; black coated steel exterior

MXM2-36RSHC - Reach-in sliding door refrigerator; white coated steel exterior

MXM2-36RSBHC - Reach-in sliding door refrigerator; black coated steel exterior

All Models Feature:

- Nominal Storage Capacity:
 - MXM2-36RHC/36RBHC.....36 Cu Ft (1019 L)
 - MXM2-36RSHC/36RSBHC.....36 Cu Ft (1019 L)
- Smooth, powder coated steel exterior available in either white or black
- Low-e double pane glass doors
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Electronic thermostat and digital LED temperature display
- HC refrigerant R290
- CFC refrigerant and foam insulation
- Self-closing swing doors or sliding doors available, both are provided with lock and key set for security
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed
- Interior LED lighting
- Designed with an illuminated plastic merchandising top panel



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|--------------|---|--|----------------------|------------------------------|----------|---------------------|-----------------------------|--------------------------|-------------------|
| MXM2-36RHC | 39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm) | 35" x 27.6" x 52.4" (889 x 701 x 1331 mm) | 36 Cu Ft (1019 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 430 lbs (196 kg) | R-290A 3.07 oz (105 g) | 2 Swing / 4 Shelves | 115V / 60Hz / 1Ph |
| MXM2-36RBHC | 39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm) | 35" x 27.6" x 52.4" (889 x 701 x 1331 mm) | 36 Cu Ft (1019 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 430 lbs (196 kg) | R-290A 3.07 oz (105 g) | 2 Swing / 4 Shelves | 115V / 60Hz / 1Ph |
| MXM2-36RSHC | 39.5" x 31" x 79.5" (1119 x 787 x 2019 mm) | 35" x 22.7" x 52.4" (889 x 577 x 1331 mm) | 36 Cu Ft (1019 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 430 lbs (196 kg) | R-290A 3.07 oz (105 g) | 2 Sliding / 4 Shelves | 115V / 60Hz / 1Ph |
| MXM2-36RSBHC | 39.5" x 31" x 79.5" (1119 x 787 x 2019 mm) | 35" x 22.7" x 52.4" (889 x 577 x 1331 mm) | 36 Cu Ft (1019 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 430 lbs (196 kg) | R-290A 3.07 oz (105 g) | 2 Sliding / 4 Shelves | 115V / 60Hz / 1Ph |



MXM2-36FHC
39.5"W x 33.5"D x 79.5"H



MXM2-36FBHC
39.5"W x 33.5"D x 79.5"H

Models:

MXM2-36FHC - Reach-in freezer; white coated steel exterior

MXM2-36FBHC - Reach-in freezer; black coated steel exterior

All Models Feature:

- Nominal Storage Capacity:
 - MXM2-36FHC/36FBHC.....36 Cu Ft (1019 L)
- Smooth, powder coated steel exterior available in either white or black
- Low-e triple pane glass doors
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Electronic thermostat and digital LED temperature display
- HC refrigerant R290
- CFC refrigerant and foam insulation
- Self-closing doors are provided with lock and key set for security
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed
- Interior LED lighting
- Designed with an illuminated plastic merchandising top panel



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|--|----------------------|----------------------------------|----------|---------------------|-----------------------------|------------------------|-------------------|
| MXM2-36FHC | 39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm) | 35" x 27.6" x 52.4" (889 x 701 x 1331 mm) | 36 Cu Ft (1019 L) | -4°F to 10°F (-20°C to -12°C) | 12.0A | 450 lbs (205 kg) | R-290A 5.29 oz (150 g) | 2 Swing / 4 Shelves | 115V / 60Hz / 1Ph |
| MXM2-36FBHC | 39.5" x 33.5" x 79.5" (1119 x 851 x 2019 mm) | 35" x 27.6" x 52.4" (889 x 701 x 1331 mm) | 36 Cu Ft (1019 L) | -4°F to 10°F (-20°C to -12°C) | 12.0A | 450 lbs (205 kg) | R-290A 5.29 oz (150 g) | 2 Swing / 4 Shelves | 115V / 60Hz / 1Ph |



MXGDM-30RBHC
27"W x 33.5"D x 79.5"H



MXGDM-50RBHC
54"W x 33.5"D x 79.5"H



MXGDM-73RBHC
81"W x 33.5"D x 79.5"H

Models:

MXGDM-30RBHC - Reach-in refrigerator; black coated steel exterior

MXGDM-50RBHC - Reach-in refrigerator; black coated steel exterior

MXGDM-73RBHC - Reach-in refrigerator; black coated steel exterior

All Models Feature:

- Nominal Storage Capacity:
 - MXGDM-30RBHC.....30 Cu Ft (850 L)
 - MXGDM-50RBHC.....50 Cu Ft (1416 L)
 - MXGDM-73RBHC.....73 Cu Ft (2067 L)
- Constructed of a powder coated steel black exterior and white interior
- Low-e double pane glass doors
- Bottom mounted compressor
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Four (4) rollers (2 with leveling feet) - 1 Door & 2 Door models
- Six (6) rollers (3 with leveling feet) - 3 Door models
- Electronic thermostat and digital LED temperature display provide accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|--------------|---|--|----------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXGDM-30RBHC | 27" x 33.5" x 79.5" (686 x 851 x 2019 mm) | 22" x 26.5" x 52.25" (559 x 673 x 1327 mm) | 30 Cu Ft (850 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 331 lbs (151 kg) | R-290A 3.0 oz (85 g) | 1 / 4 | 115V / 60Hz / 1Ph |
| MXGDM-50RBHC | 54" x 33.5" x 79.5" (1372 x 851 x 2019 mm) | 49.4" x 26.5" x 52.25" (1255 x 673 x 1327 mm) | 50 Cu Ft (1416 L) | 33°F to 41°F (1°C to 5°C) | 4.5A | 540 lbs (245 kg) | R-290A 3.7 oz (105 g) | 2 / 8 | 115V / 60Hz / 1Ph |
| MXGDM-73RBHC | 81" x 33.5" x 79.5" (2057 x 851 x 2019 mm) | 76.4" x 26.5" x 52.25" (1941 x 673 x 1327 mm) | 73 Cu Ft (2067 L) | 33°F to 41°F (1°C to 5°C) | 7.0A | 741 lbs (337 kg) | R-290A 5.29 oz (150 g) | 3 / 12 | 115V / 60Hz / 1Ph |



MXGDM-30FBHC
27"W x 33.5"D x 79.5"H



MXGDM-50FBHC
54"W x 33.5"D x 79.5"H



MXGDM-73FBHC
81"W x 33.5"D x 79.5"H

Models:

MXGDM-30FBHC - Reach-in freezer; black coated steel exterior

MXGDM-50FBHC - Reach-in freezer; black coated steel exterior

MXGDM-73FBHC - Reach-in freezer; black coated steel exterior

All Models Feature:

- Nominal Storage Capacity:
 - MXGDM-30FBHC.....30 Cu Ft (850 L)
 - MXGDM-50FBHC.....50 Cu Ft (1416 L)
 - MXGDM-73FBHC.....73 Cu Ft (2067 L)
- Constructed of a powder coated steel black exterior and white interior
- Low-e triple pane glass doors
- Bottom mounted compressor
- Four (4) adjustable heavy-duty PE-coated wire shelves per door, include pricing strips
- Four (4) rollers (2 with leveling feet) - 1 Door & 2 Door models
- Six (6) rollers (3 with leveling feet) - 3 Door models
- Electronic thermostat and digital LED temperature display provide accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|--------------|---|--|----------------------|----------------------------------|----------|---------------------|-----------------------------|-----------------|-----------------------|
| MXGDM-30FBHC | 27" x 33.5" x 79.5" (686 x 851 x 2019 mm) | 22" x 26.5" x 52.25" (559 x 673 x 1327 mm) | 30 Cu Ft (850 L) | -4°F to 10°F (-20°C to -12°C) | 8.0A | 353 lbs (161 kg) | R-290A 3.88 oz (110 g) | 1 / 4 | 115V / 60Hz / 1Ph |
| MXGDM-50FBHC | 54" x 33.5" x 79.5" (1372 x 851 x 2019 mm) | 49.4" x 26.5" x 52.25" (1255 x 673 x 1327 mm) | 50 Cu Ft (1416 L) | -4°F to 10°F (-20°C to -12°C) | 9.0A | 567 lbs (257 kg) | R-290A 5.29 oz (150 g) | 2 / 8 | 115V / 60Hz / 1Ph |
| MXGDM-73FBHC | 81" x 33.5" x 79.5" (2057 x 851 x 2019 mm) | 76.4" x 26.5" x 52.25" (1941 x 673 x 1327 mm) | 73 Cu Ft (2067 L) | -4°F to 10°F (-20°C to -12°C) | 9.0A | 829 lbs (376 kg) | R-290A 5.29 oz (150 g) | 3 / 12 | 115-230V / 60Hz / 1Ph |



MXM1-23FHC-ICE
27"W x 33.5"D x 79.5"H



MXM2-48FHC-ICE
54"W x 33.5"D x 79.5"H

Models:

MXM1-23FHC-ICE - Reach-in freezer; white coated steel exterior

MXM2-48FHC-ICE - Reach-in freezer; white coated steel exterior

All Models Feature:

- Nominal Storage Capacity:
 - MXM1-23FCH-ICE.....23 Cu Ft (651 L)
 - MXM2-48FCH-ICE.....48 Cu Ft (1359 L)
- Constructed of a white powder coated steel exterior and interior
- Low-e triple pane glass doors
- Bottom mounted compressor
- One (1) heavy-duty PE-coated floor support with customer facing bag retainer per section
- Four (4) rollers (2 with leveling feet)
- Electronic thermostat and digital LED temperature display provides accurate and easy reading
- Self-closing doors are provided with lock and key set for security
- Magnetic gasket can be replaced without tools
- CFC free refrigerant and foam
- Automatic defrost system, equipped with integrated condensate pan therefore no drain line connection is needed
- Designed with an illuminated plastic merchandising top panel



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS | ELECTRICAL |
|----------------|---|--|----------------------|---------------------------------|----------|---------------------|-----------------------------|-------|-------------------|
| MXM1-23FHC-ICE | 27" x 33.5" x 79.5" (686 x 851 x 2019 mm) | 22.2" x 27.6" x 52.4" (564 x 701 x 1331 mm) | 23 Cu Ft (651 L) | 0°F to 10°F (-18°C to -12°C) | 8.0A | 353 lbs (161 kg) | R-290A 3.88 oz (110 g) | 1 | 115V / 60Hz / 1Ph |
| MXM2-48FHC-ICE | 54" x 33.5" x 79.5" (1372 x 851 x 2019 mm) | 49.4" x 7.6" x 52.4" (1255 x 701 x 1331 mm) | 48 Cu Ft (1359 L) | 0°F to 10°F (-18°C to -12°C) | 9.0A | 567 lbs (258 kg) | R-290A 5.29 oz (150 g) | 2 | 115V / 60Hz / 1Ph |



MXM1-2RHC
MXM1-2FHC
22.4"W x 22"D x 20.9"H



MXM1-2.5FHC
22.4"W x 22"D x 20.9"H



MXM1-3.5RHC
MXM1-3.5FHC
22.4"W x 22"D x 20.9"H



MXM1-4FHC
22.4"W x 22"D x 20.9"H

Refrigerators:

MXM1-2RHC - Reach-in refrigerator; coated steel exterior

MXM1-3.5RHC - Reach-in refrigerator; coated steel exterior

Freezers:

MXM1-2FHC - Reach-in freezer; coated steel exterior

MXM1-2.5FHC - Reach-in freezer; coated steel exterior

MXM1-3.5FHC - Reach-in freezer; coated steel exterior

MXM1-4FHC - Reach-in freezer; coated steel exterior

All Models Feature:

- Constructed of white painted steel exterior and ABS interior
- Mutli-pane, self-closing glass door with magnetic compression gaskets
- Interior LED lighting
- Bottom mounted compressor
- Equipped with adjustable heavy-duty PE-coated wire shelves
- Supplied with four (4) adjustable leveling feet
- Digital controls with LED temperature display
- Automatic defrost cycle
- Provided with lock and key set for security
- Foamed urethane insulation to improve temperature regulation
- Supplied with integrated condensate evaporator therefore no drain line connection is needed



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|-------------|---|---|-----------------------|---------------------------------|----------|----------------------|-----------------------------|-----------------|-------------------|
| MXM1-2RHC | 22.4" x 22" x 20.9" (569 x 558 x 531 mm) | 19.3" x 17.3" x 16.5" (490 x 439 x 406 mm) | 2.1 Cu Ft (59.5 L) | 33°F to 41°F (1°C to 5°C) | 1.2A | 94.8 lbs (43 kg) | R-600A 1.41 oz (40 g) | 1 / 2 | 115V / 60Hz / 1Ph |
| MXM1-3.5RHC | 24.4" x 22" x 27.2" (620 x 558 x 691 mm) | 21.3" x 17.7" x 22.8" (541 x 450 x 579 mm) | 3.5 Cu Ft (102 L) | 33°F to 41°F (1°C to 5°C) | 1.2A | 117 lbs (53 kg) | R-600A 1.76 oz (50 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-2FHC | 22.4" x 22" x 20.9" (569 x 558 x 531 mm) | 19.3" x 17.3" x 16.5" (490 x 439 x 406 mm) | 2.1 Cu Ft (59.5 L) | 0°F to 10°F (-18°C to -12°C) | 1.8A | 101.4 lbs (46 kg) | R-600A 1.59 oz (45 g) | 1 / 2 | 115V / 60Hz / 1Ph |
| MXM1-2.5FHC | 22.4" x 22" x 28.7" (569 x 558 x 729 mm) | 19.3" x 17.3" x 16.5" (490 x 439 x 406 mm) | 2.6 Cu Ft (73.5 L) | 0°F to 10°F (-18°C to -12°C) | 1.8A | 115 lbs (52 kg) | R-600A 1.59 oz (45 g) | 1 / 2 | 115V / 60Hz / 1Ph |
| MXM1-3.5FHC | 24.4" x 22" x 27.2" (620 x 558 x 691 mm) | 21.3" x 17.7" x 22.8" (541 x 450 x 579 mm) | 3.5 Cu Ft (102 L) | 0°F to 10°F (-18°C to -12°C) | 2.5A | 123.5 lbs (56 kg) | R-290A 2.29 oz (65 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MXM1-4FHC | 22.4" x 22" x 35" (569 x 558 x 889 mm) | 21.3" x 17.7" x 22.8" (541 x 450 x 579 mm) | 4.2 Cu Ft (119 L) | 0°F to 10°F (-18°C to -12°C) | 2.5A | 143 lbs (65 kg) | R-290A 2.29 oz (65 g) | 1 / 3 | 115V / 60Hz / 1Ph |

4-SIDED GLASS COUNTERTOP MERCHANDISER REFRIGERATORS



MECR-31D
16.7"W x 15.9"D x 38.6"H



MECR-32D
16.7"W x 15.9"D x 38.6"H

Models:

MECR-31D - Reach-in refrigerator; white coated steel exterior

MECR-32D - Reach-in refrigerator; black coated steel exterior

All Models Feature:

- Durable, corrosion resistant black painted steel and stainless steel exterior with black plastic trim
- Easy to clean, low maintenance ABS interior
- Dual pane tempered glass doors and sides prevent heat loss and minimize condensation
- Interior LED lighting
- Digital controls deliver precise temperature regulation
- Internal bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions
- Internal condensate evaporator pan included, so no drain connection is needed
- Flat top accommodates POP or other marketing displays
- Three (3) heavy-duty, adjustable chrome-plated wire shelves
- 2" legs (two front adjustable leveling legs)



| MODEL | EXTERNAL DIMENSIONS | NOMINAL CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|----------|---|-------------------|-------------------------------|----------|-----------------------|-----------------------------|-----------------|-------------------|
| MECR-31D | 16.7" x 15.9" x 38.6" (425 x 404 x 980 mm) | 3 Cu Ft (85 L) | 33°F to 54°F (1°C to 12°C) | 2.0A | 84.9 lbs (38.5 kg) | R-290A 1.41 oz (40 g) | 1 / 3 | 115V / 60Hz / 1Ph |
| MECR-32D | 16.7" x 15.9" x 38.6" (425 x 404 x 980 mm) | 3 Cu Ft (85 L) | 33°F to 54°F (1°C to 12°C) | 2.0A | 86 lbs (39 kg) | R-290A 1.41 oz (40 g) | 2 / 3 | 115V / 60Hz / 1Ph |



 **MAXX COLD**
X-series

 **MAXX COLD**
SELECTSERIES

UNDERCOUNTER REFRIGERATORS AND FREEZERS

Our undercounter refrigeration options pair reliable cold storage and sturdy construction with valuable countertop space. A variety of sizes are available in both refrigerators and freezers to meet your needs.

UNDERCOUNTER REFRIGERATORS & FREEZERS



MXCR27U-FBHC
27.5"W x 30"D x 31.5"H

MXCR27UHC
MXCF27UHC
27.5"W x 30"D x 35.5"H

MXCR48UHC
MXCF48UHC
48.3125"W x 30"D x 35.5"H

MXCR60UHC
MXCF60UHC
60.375"W x 30"D x 35.5"H

MXCR72UHC
72.375"W x 30"D x 35.5"H

Refrigerators:

- MXCR27UHC** - Undercounter refrigerator; stainless steel exterior
- MXCR27U-FBHC** - Undercounter refrigerator; stainless steel exterior
- MXCR48UHC** - Undercounter refrigerator; stainless steel exterior
- MXCR60UHC** - Undercounter refrigerator; stainless steel exterior
- MXCR72UHC** - Undercounter refrigerator; stainless steel exterior

Freezers:

- MXCF27UHC** - Undercounter freezer; stainless steel exterior
- MXCF48UHC** - Undercounter freezer; stainless steel exterior
- MXCF60UHC** - Undercounter freezer; stainless steel exterior

All Models Feature:

- Durable, easy to clean stainless steel exterior
- Painted aluminum interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (2 with brakes)
- Solid state digital control system
- LED temperature display
- Accommodates full-size sheet pans
- Automatic defrost system
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Urethane insulated walls and doors
- MXCR27U-FBHC: Compact front-breathing design accommodates tight spaces



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | ELECTRICAL |
|--------------|---|--|-----------------------|----------------------------------|----------|---------------------|-----------------------------|-----------------|-------------------|
| MXCR27UHC | 27.5" x 30" x 35.5" (699 x 762 x 911 mm) | 22.9" x 18.8" x 24.5" (602 x 478 x 622 mm) | 6.5 Cu Ft (184 L) | 33°F to 41°F (1°C to 5°C) | 1.5A | 220 lbs (100 kg) | R-600a 2.47 oz (68 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXCR27U-FBHC | 27.5" x 30" x 31.5" (700 x 760 x 800 mm) | 23.4" x 16.6" x 20.7" (594 x 423 x 525 mm) | 6.5 Cu Ft (184 L) | 33°F to 41°F (1°C to 5°C) | 1.5A | 243 lbs (110 kg) | R-600a 2.47 oz (68 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXCR48UHC | 48.3125" x 30" x 35.5" (1227 x 762 x 911 mm) | 43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 304 lbs (140 kg) | R-600a 2.65 oz (75 g) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXCR60UHC | 60.375" x 30" x 35.5" (1533 x 762 x 911 mm) | 56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm) | 15.5 Cu Ft (439 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 352 lbs (160 kg) | R-600a 2.82 oz (80 g) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXCR72UHC | 72.375" x 30" x 35.5" (1839 x 762 x 911 mm) | 66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm) | 18 Cu Ft (510 L) | 33°F to 41°F (1°C to 5°C) | 3.5A | 430 lbs (195 kg) | R-290a 4.59 oz (130 g) | 3 / 3 | 115V / 60Hz / 1Ph |
| MXCF27UHC | 27.5" x 30" x 35.5" (699 x 762 x 911 mm) | 22.9" x 18.8" x 24.5" (602 x 478 x 622 mm) | 6.5 Cu Ft (184 L) | -4°F to 10°F (-20°C to -12°C) | 1.9A | 224 lbs (102 kg) | R-290a 3.35 oz (95 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXCF48UHC | 48.3125" x 30" x 35.5" (1227 x 762 x 911 mm) | 43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm) | 12 Cu Ft (340 L) | -4°F to 10°F (-20°C to -12°C) | 4.0A | 310 lbs (141 kg) | R-290a 3.53 oz (100 g) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXCF60UHC | 60.375" x 30" x 35.5" (1533 x 762 x 911 mm) | 56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm) | 15.5 Cu Ft (439 L) | -4°F to 10°F (-20°C to -12°C) | 5.0A | 362 lbs (166 kg) | R-290a 3.53 oz (100 g) | 2 / 2 | 115V / 60Hz / 1Ph |



MXSR29UHC
MXSF29UHC
29"W x 30.3"D x 38.3"H



MXSR48UHC
MXSF48UHC
48"W x 30.3"D x 38.3"H



MXSR60UHC
MXSF60UHC
60"W x 30.3"D x 38.3"H

Refrigerators:

MXSR29UHC - Undercounter refrigerator; stainless steel exterior

MXSR48UHC - Undercounter refrigerator; stainless steel exterior

MXSR60UHC - Undercounter refrigerator; stainless steel exterior

Freezers:

MXSF27UHC - Undercounter freezer; stainless steel exterior

MXSF48UHC - Undercounter freezer; stainless steel exterior

MXSF60UHC - Undercounter freezer; stainless steel exterior

All Models Feature:

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Heavy-duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easy to grip, stainless steel, self-closing doors with integrated door handles
- Equipped with four (4) Casters (2 with brakes)
- Adjustable shelves (one per section/door)



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT | DOORS / SHELVES | ELECTRICAL |
|-----------|--|--|-----------------------|---------------------------------|----------|---------------------|-------------|-----------------|-------------------|
| MXSR29UHC | 29" x 30.3" x 38.3" (735 x 770 x 976 mm) | 24" x 23.4" x 26.6" (610 x 636 x 676 mm) | 6.7 Cu Ft (184 L) | 33°F to 41°F (1°C to 5°C) | 3.6A | 143 lbs (65 kg) | R-290a | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSR48UHC | 48" x 30.3" x 38.3" (1230 x 770 x 976 mm) | 43" x 23.4" x 26.6" (1105 x 636 x 676 mm) | 11.1 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 242 lbs (110 kg) | R-290a | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSR60UHC | 61" x 30.3" x 38.3" (1555 x 770 x 976 mm) | 56" x 23.4" x 26.6" (1430 x 636 x 676 mm) | 14.1 Cu Ft (439 L) | 33°F to 41°F (1°C to 5°C) | 5.6A | 265 lbs (120 kg) | R-290a | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSF29UHC | 29" x 30.3" x 38.3" (735 x 770 x 976 mm) | 24" x 23.4" x 26.6" (610 x 636 x 676 mm) | 6.7 Cu Ft (184 L) | 0°F to 10°F (-18°C to -23°C) | 3.6A | 143 lbs (65 kg) | R-290a | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSF48UHC | 48" x 30.3" x 38.3" (1230 x 770 x 976 mm) | 43" x 23.4" x 26.6" (1105 x 636 x 676 mm) | 11.1 Cu Ft (340 L) | 0°F to 10°F (-18°C to -23°C) | 4.3A | 242 lbs (110 kg) | R-290a | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSF60UHC | 61" x 30.3" x 38.3" (1555 x 770 x 976 mm) | 56" x 23.4" x 26.6" (1430 x 636 x 676 mm) | 14.1 Cu Ft (439 L) | 0°F to 10°F (-18°C to -23°C) | 5.6A | 265 lbs (120 kg) | R-290a | 2 / 2 | 115V / 60Hz / 1Ph |



 **MAXX COLD**
SELECT SERIES

CHEST FREEZERS

Store meats and frozen products conveniently with the full line of Select Series Chest Freezers. Featuring easy-to-use controls, our chest freezers are a terrific solution to keep ingredients fresh and accessible.



MXSH3.4SHC
22.8"W x 22"D x 33.625"H



MXSH5.2SHC
30.4"W x 22"D x 33.625"H



MXSH7.0SHC
37.8"W x 22"D x 33.625"H



MXSH9.6SHC
40.6"W x 29.7"D x 33.625"H



MXSH12.7SHC
50"W x 29.7"D x 33.625"H

Models:

MXSH3.4SHC - Solid-top chest freezer; coated steel exterior

MXSH5.2SHC - Solid-top chest freezer; coated steel exterior

MXSH7.0SHC - Solid-top chest freezer; coated steel exterior

MXSH9.6SHC - Solid-top chest freezer; coated steel exterior

MXSH12.7SHC - Solid-top chest freezer; coated steel exterior

All Models Feature:

- Sturdy hinged top opening lid that opens up to 90°
- Includes lock to provide security even if unattended
- Utilizes R-600A refrigerant
- Equipped with one (1) white wire storage basket
- Supplied with low profile roller wheels
- Can hold the contents safely for 2 days in case of a power outage



| MODEL | EXTERNAL DIMENSIONS | CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | LIDS/ BASKETS | ELECTRICAL |
|-------------|--|--------------------------|-------------------------------------|----------|----------------------|-----------------------------|---------------|-------------------|
| MXSH3.4SHC | 22.8 x 22 x 33.625 579 x 559 x 854 mm | 3.4 Cu Ft (96 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.0A | 75 lbs (34 kg) | R-600a 1.76 oz (50 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH5.2SHC | 30.4 x 22 x 33.625 772 x 559 x 854 mm | 5.2 Cu Ft (147 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.0A | 92.6 lbs (42 kg) | R-600a 1.98 oz (56 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH7.0SHC | 37.8 x 22 x 33.625 960 x 559 x 854 mm | 7.0 Cu Ft (198 L) | -11.2°F to -1°F (-24°C to -18°C) | 5.6A | 99.2 lbs (45 kg) | R-600a 1.90 oz (54 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH9.6SHC | 40.6" x 29.7" x 33.625" 1030 x 755 x 854 mm | 9.6 Cu Ft (272 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.5A | 136.7 lbs (62 kg) | R-600a 2.65 oz (75 g) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSH12.7SHC | 50" x 29.7" x 33.625" 1270 x 755 x 854 mm | 12.7 Cu Ft (360 L) | -11.2°F to -1°F (-24°C to -18°C) | 1.5A | 152.1 lbs (69 kg) | R-600a 3.0 oz (85 g) | 1 / 1 | 115V / 60Hz / 1Ph |



MXSH15.9SHC
60.2"W x 29.7"D x 33.625"H



MXSH19.4SHC
71.3"W x 29.7"D x 33.625"H



MXSH23.6SHC
78.75"W x 29.7"D x 33.625"H



MXSH30.0SHC
76"W x 35.25"D x 35.83"H

Models:

MXSH15.9SHC - Solid-top chest freezer; coated steel exterior

MXSH19.4SHC - Solid-top chest freezer; coated steel exterior

MXSH23.6SHC - Solid-top chest freezer; coated steel exterior

MXSH30.0SHC - Solid-top chest freezer; coated steel exterior

All Models Feature:

- Sturdy hinged top opening lid that opens up to 90°
- Includes lock to provide security even if unattended
- Utilizes R-290A refrigerant
- Equipped with two (2) white wire storage baskets
- Supplied with low profile roller wheels
- Can hold the contents safely for 2 days in case of a power outage



| MODEL | EXTERNAL DIMENSIONS | CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | LIDS/BASKETS | ELECTRICAL |
|-------------|--|-----------------------|-------------------------------------|----------|-----------------------|-----------------------------|--------------|-------------------|
| MXSH15.9SHC | 60.2" x 29.7" x 33.625" 1530 x 755 x 854 mm | 15.9 Cu Ft (450 L) | -11.2°F to -1°F (-24°C to -18°C) | 2.6A | 185.2 lbs (84 kg) | R-290a 3.2 oz (91 g) | 1 / 2 | 115V / 60Hz / 1Ph |
| MXSH19.4SHC | 71.3 x 29.7 x 33.625 1810 x 755 x 854 mm | 19.4 Cu Ft (549 L) | -11.2°F to -1°F (-24°C to -18°C) | 2.6A | 205 lbs (93 kg) | R-290a 3.53 oz (100 g) | 1 / 2 | 115V / 60Hz / 1Ph |
| MXSH23.6SHC | 78.75 x 29.7 x 33.625 2000 x 755 x 854 mm | 23.6 Cu Ft (669 L) | -11.2°F to -1°F (-24°C to -18°C) | 2.1A | 198.4 lbs (90 kg) | R-290a 4.94 oz (140 g) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSH30.0SHC | 76 x 35.25 x 35.83 1930 x 895 x 910 mm | 30.0 Cu Ft (850 L) | -11.2°F to -1°F (-24°C to -18°C) | 2.1A | 242.5 lbs (110 kg) | R-290a 5.29 oz (150 g) | 2 / 2 | 115V / 60Hz / 1Ph |



 **MAXX COLD**
X-series

DIPPING CABINETS & ICE CREAM DISPLAY FREEZERS

Display and store ice cream, gelato, sorbet and frozen treats with Maxx Cold Dipping Cabinets and Mobile Ice Cream Freezers. The glass top design and LED lights illuminate and enhance your products, while the heat reflective glass ensures consistent temperature.



MXDC-4
31.5"W x 27.2"D x 50.4"H



MXDC-8
51.7"W x 27.2"D x 50.4"H



MXDC-12
70"W x 27.2"D x 50.4"H

Models:

MXDC-4 - Dipping cabinet; coated steel exterior

MXDC-8 - Dipping cabinet coated steel exterior

MXDC-12 - Dipping cabinet; coated steel exterior

All Models Feature:

- Exterior Material: durable, white powder coated steel
- Interior Material: white powder coated steel
- Tub Holders: coated wire with acrylic covers
- Insulation: 2.5" foamed in-place polyurethane
- Flat, tempered clear glass sliding lids
- Lock and key set with removable pin
- Interior LED lighting enhances product's appearance
- Curved tempered glass sneeze guard (assembly required)
- Heated molded plastic lid frame prevents frost build-up
- Internal condensate evaporator pan, no floor drain needed
- Bottom defrost drain with plug
- Four (4) heavy-duty casters, two (2) with brakes
- Removable rubber bumper guards, grill side
- Plastic frost scraper included
- Adjustable temperature range -18°F to +10°F (-28°C to -12°C)
- Thermometer display: external, digital, easily read
- Includes: Hanging tub holders and spill skirts

Optional Accessories (Sold Separately):

- Dipper well with faucet #XDCWELL




- Zeroll® scoops and spades (Various models available - inquire for info)



- Gelato pans #XDCCPAN-5



- Gelato pan holders & Novelty baskets #XDCBASKET3 / #XDCBASKETN3

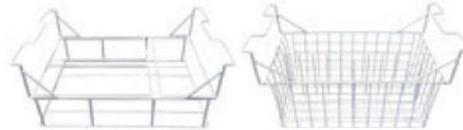

| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | TOTAL TUB STORAGE | TUBS EXPOSED FOR SCOOPING | ELECTRICAL |
|---------|---|--|-----------------------|-----------------------------------|----------|---------------------|-----------------------------|-------------------|---------------------------|-------------------|
| MXDC-4 | 31.5" x 27.2" x 50.4" (800 x 691 x 1280 mm) | 25.5" x 21.5" x 26.5" (648 x 546 x 673 mm) | 6.5 Cu Ft (184 L) | -18°F to 10°F (-28°C to -12°C) | 1.3A | 184 lbs (83 kg) | R290 2.65 oz (75 g) | 6 | 4 | 115V / 60Hz / 1Ph |
| MXDC-8 | 51.7" x 27.2" x 50.4" (1313 x 691 x 1280 mm) | 46.5" x 21.5" x 26.5" (1181 x 546 x 673 mm) | 8.8 Cu Ft (249 L) | -18°F to 10°F (-28°C to -12°C) | 2.0A | 262 lbs (119 kg) | R290 3.6 oz (102 g) | 14 | 8 | 115V / 60Hz / 1Ph |
| MXDC-12 | 70" x 27.2" x 50.4" (1778 x 691 x 1280 mm) | 65.5" x 21.5" x 26.5" (1664 x 546 x 673 mm) | 11.1 Cu Ft (314 L) | -18°F to 10°F (-28°C to -12°C) | 4.1A | 320 lbs (145 kg) | R290 4.76 oz (135 g) | 22 | 12 | 115V / 60Hz / 1Ph |



MXF31F

31.5"W x 27.2"D x 50.4"H

MXF52F

51.7"W x 27.2"D x 50.4"H

MXF71F

70"W x 27.2"D x 50.4"H

Models:

MXF31F - Mobile ice cream freezer; coated steel exterior

MXF52F - Mobile ice cream freezer; coated steel exterior

MXF71F - Mobile ice cream freezer; coated steel exterior

All Models Feature:

- Exterior Material: durable, white powder coated steel
- Interior Material: white power coated steel
- Flat coated wire baskets with 3 compartments each
- Insulation: 2.5" foamed in-place polyurethane
- Flat, tempered clear glass sliding lids
- Lock and key set with removable pin
- Interior LED lighting enhances product's appearance
- Heated molded plastic lid frame prevents frost build-up
- Internal condensate evaporator pan, no floor drain needed
- Bottom defrost drain with plug
- Four (4) or six (6) heavy-duty casters, two (2) with brakes
- Removable rubber bumper guards, grill side
- Plastic frost scraper included
- Adjustable temperature range -18°F to +10°F (-28°C to -12°C)
- Thermometer display: external, analog, easily read
- Includes: Novelty baskets

Optional Accessories (Sold Separately):

- Zeroll® scoops and spades (Various models available - inquire for info)
- Gelato pans
- Gelato pan holders & Novelty baskets
- Double 3-gallon tub hanging baskets with skirt



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | BASKETS | ELECTRICAL |
|--------|---|---|----------------------|-----------------------------------|----------|-----------------|-----------------------------|---------|-------------------|
| MXF31F | 31.5" x 27.2" x 50.4" (800 x 690 x 1280 mm) | 25.5" x 21.5" x 26.5" (648 x 546 x 673 mm) | 5.8 Cu Ft (164 L) | -18°F to 10°F (-28°C to -12°C) | 1.3A | 130 lbs (59 kg) | R290 2.65 oz (75 g) | 2 | 115V / 60Hz / 1Ph |
| MXF52F | 51.7" x 27.2" x 50.4" (1313 x 690 x 1280 mm) | 40" x 25.2" x 13.9" (1017 x 639 x 353 mm) | 11 Cu Ft (312 L) | -18°F to 10°F (-28°C to -12°C) | 2.0A | 179 lbs (81 kg) | R290 3.6 oz (102 g) | 4 | 115V / 60Hz / 1Ph |
| MXF71F | 70" x 27.2" x 50.4" (1778 x 690 x 1280 mm) | 52" x 25.2" x 13.9" (1320 x 639 x 353 mm) | 16 Cu Ft (453 L) | -18°F to 10°F (-28°C to -12°C) | 4.1A | 219 lbs (99 kg) | R290 4.76 oz (135 g) | 5 | 115V / 60Hz / 1Ph |

MOBILE ICE CREAM FREEZERS



MXF25CHC-2
24.6"W x 27.6"D x 32.6"H



MXF32CHC-3
31.5"W x 27.5"D x 33.5"H



MXF40CHC-4
39.4"W x 27.5"D x 33.5"H



MXF48CHC-5
47.4"W x 27.5"D x 33.5"H



MXF54CHC-6
53.2"W x 27.5"D x 33.5"H



MXF64CHC-7
63.4"W x 27.5"D x 33.5"H



MXF72CHC-8
71.7"W x 27.5"D x 33.5"H

Models:

MXF25CHC-2 - Mobile ice cream freezer; coated steel exterior

MXF32CHC-3 - Mobile ice cream freezer; coated steel exterior

MXF40CHC-4 - Mobile ice cream freezer; coated steel exterior

MXF48CHC-5 - Mobile ice cream freezer; coated steel exterior

MXF54CHC-6 - Mobile ice cream freezer; coated steel exterior

MXF64CHC-7 - Mobile ice cream freezer; coated steel exterior


MXF72CHC-8 - Mobile ice cream freezer; coated steel exterior

All Models Feature:

- Clear, curved glass sliding lids
- Easy grip sliding lid handle
- Lid lock and keys
- Interior LED lights makes it easier to see selection and enhance product's appearance
- Molded plastic lid frame heated to prevent frost or ice build-up
- Internal condensate evaporator pan. No need for a floor drain.
- Equipped with four (4) or six (6) heavy-duty casters
- Removable rubber bumper guards, side grill



| MODEL | EXTERIOR DIMENSIONS | CAPACITY | HOLDING TEMPERATURE RANGE | REFRIGERANT AND CHARGE SIZE | UNIT WEIGHT | AMP DRAW | HP | INCLUDED BASKETS |
|------------|---|----------------------|-----------------------------------|-----------------------------|--------------------|----------|------|------------------|
| MXF25CHC-2 | 24.6 x 27.6 x 32.6 625 x 700 x 828 mm | 3.81 Cu Ft 108 L | -18°F to 10°F (-28°C to -12°C) | R290a 2.43 oz / 69 g | 103.6 lb 47 kg | 1.0A | 1/9 | 2 |
| MXF32CHC-3 | 31.5 x 27.5 x 33.5 800 x 697 x 850 mm | 4.87 Cu Ft 138 L | -18°F to 10°F (-28°C to -12°C) | R290a 2.65 oz / 75 g | 114.6 lb 52 kg | 1.3A | 1/7 | 3 |
| MXF40CHC-4 | 39.4 x 27.5 x 33.5 1000 x 697 x 850 mm | 6.71 Cu Ft 190 L | -18°F to 10°F (-28°C to -12°C) | R290a 3 oz / 85 g | 130.1 lb 59 kg | 1.4A | 1/5 | 4 |
| MXF48CHC-5 | 47.4 x 27.5 x 33.5 1204 x 697 x 850 mm | 8.62 Cu Ft 244 L | -18°F to 10°F (-28°C to -12°C) | R290a 3.53 oz / 100 g | 152.1 lb 69 kg | 2.0A | 1/4 | 5 |
| MXF54CHC-6 | 53.2 x 27.5 x 33.5 1350 x 697 x 850 mm | 9.96 Cu Ft 282 L | -18°F to 10°F (-28°C to -12°C) | R290a 4.06 oz / 115 g | 165.4 lb 75 kg | 2.0A | 1/4 | 6 |
| MXF64CHC-7 | 63.4 x 27.5 x 33.5 1610 x 697 x 850 mm | 12.36 Cu Ft 350 L | -18°F to 10°F (-28°C to -12°C) | R290a 4.23 oz / 120 g | 187.4 lb 85 kg | 2.0A | 1/4+ | 7 |
| MXF72CHC-8 | 71.7 x 27.5 x 33.5 1820 x 697 x 850 mm | 14.30 Cu Ft 405 L | -18°F to 10°F (-28°C to -12°C) | R290a 4.76 oz / 135 g | 231.5 lb 105 kg | 2.8A | 1/2 | 8 |

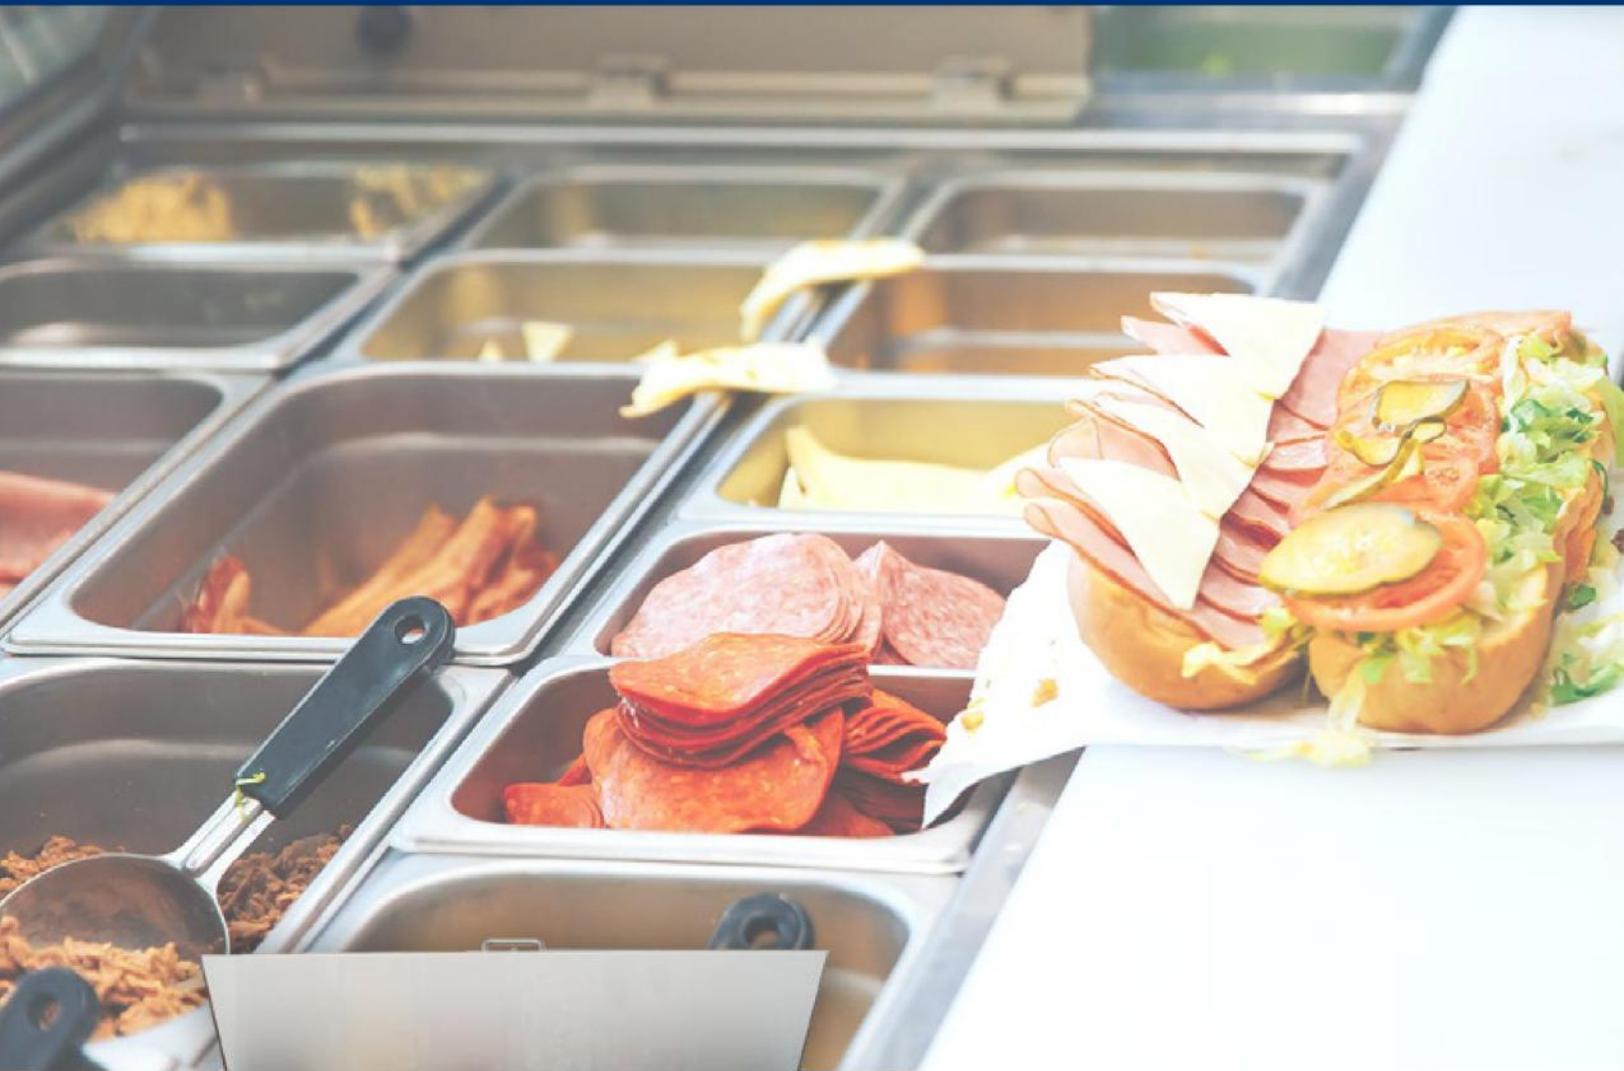

 **MAXX COLD**
X-series

 **MAXX COLD**
SELECTSERIES

PREP TABLES

Maxx Cold Food Preparation Tables are available in a variety of capacities and styles, designed to meet the needs of any commercial kitchen. Choose from Sandwich/Salad Stations, expanded capacity Megatop units, or Pizza Prep tables.



MXCR29SHC

28.9"W x 29.9"D x 43.2"H

MXCR48SHC

48.2"W x 29.9"D x 43.2"H

MXCR60SHC

61.2"W x 29.9"D x 43.2"H

MXCR72SHC

71.7"W x 29.9"D x 43.2"H

Models:

MXCR29SHC - Sandwich station; stainless steel exterior

MXCR48SHC - Sandwich station; stainless steel exterior

MXCR60SHC - Sandwich station; stainless steel exterior

MXCR72SHC - Sandwich station; stainless steel exterior

All Models Feature:

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Supplied with four (4) 3" swivel casters (2 with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans (not compatible with pans deeper than 4")
- Supplied with 11.42" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | PANS (1/6) | ELECTRICAL |
|-----------|--|--|--------------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|------------|-------------------|
| MXCR29SHC | 28.9" x 29.9 x 43.2" (699 x 760 x 1098 mm) | 22.9" x 18.8" x 24.5" (602 x 478 x 622 mm) | 7 Cu Ft (198 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 218 lbs (99 kg) | R290a 3.0 oz (85 g) | 1 / 1 | 8 | 115V / 60Hz / 1Ph |
| MXCR48SHC | 48.2" x 29.9 x 43.2" (1225 x 760 x 1098 mm) | 43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 304 lbs (140 kg) | R-290a 3.17 oz (90 g) | 2 / 2 | 12 | 115V / 60Hz / 1Ph |
| MXCR60SHC | 61.2" x 29.9 x 43.2" (1555 x 760 x 1098 mm) | 56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm) | 15.5 Cu Ft (439 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 352 lbs (160 kg) | R-290a 3.17 oz (90 g) | 2 / 2 | 16 | 115V / 60Hz / 1Ph |
| MXCR72SHC | 71.7" x 29.9 x 43.2" (1822 x 760 x 1098 mm) | 66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm) | 18 Cu Ft (510 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 430 lbs (195 kg) | R-290a 3.35 oz (95 g) | 3 / 3 | 18 | 115V / 60Hz / 1Ph |



MXSR29SHC
29"W x 30.3"D x 45.4"H



MXSR48SHC
48.4"W x 30.3"D x 45.4"H



MXSR60SHC
61.2"W x 30.3"D x 45.4"H

Models:

MXSR29SHC - Sandwich station; stainless steel exterior

MXSR48SHC - Sandwich station; stainless steel exterior

MXSR60SHC - Sandwich station; stainless steel exterior

All Models Feature:

- Durable, easy to clean stainless steel exterior and interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Supplied with four (4) 6" swivel casters (2 with brakes)
- Equipped with full set of pans
- Automatic defrost system
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Equipped with a food grade plastic cutting board and full set of clip-on divider bars and plastic pans
- Self-closing doors
- Polyurethane insulated doors and walls
- Accommodates full-size sheet pans



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT | PAN CAPACITY 1/3 (1/6) | DOORS / SHELVES | ELECTRICAL |
|-----------|---|--|--------------------------|------------------------------|----------|---------------------|-------------|------------------------|-----------------|-------------------|
| MXSR29SHC | 29" x 30.3" x 45.4" (735 x 770 x 1152 mm) | 24" x 23.4" x 26.6" (610 x 636 x 676 mm) | 7.59 Cu Ft (215 L) | 33°F to 41°F (1°C to 5°C) | 3.6A | 150 lbs (68 kg) | R-290a | 4 (8) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSR48SHC | 48" x 30.3" x 45.4" (1230 x 770 x 1152 mm) | 43" x 23.4" x 26.6" (1105 x 636 x 676 mm) | 13.8 Cu Ft (390 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 256 lbs (116 kg) | R-290a | 6 (12) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSR60SHC | 61" x 30.3" x 45.4" (1555 x 770 x 1152 mm) | 56" x 23.4" x 26.6" (1430 x 636 x 676 mm) | 17.8 Cu Ft (505 L) | 33°F to 41°F (1°C to 5°C) | 5.6A | 298 lbs (135 kg) | R-290a | 8 (16) | 2 / 2 | 115V / 60Hz / 1Ph |



MXCR29MHC

28.9"W x 34.5"D x 43.2"H

MXCR48MHC

28.9"W x 34.5"D x 43.2"H

MXCR60MHC

61.2"W x 34.5"D x 43.2"H

MXCR72MHC

71.7"W x 34.5"D x 43.2"H

Models:

MXCR29MHC - Megatop prep table; stainless steel exterior

MXCR48MHC - Megatop prep table; stainless steel exterior

MXCR60MHC - Megatop prep table; stainless steel exterior

MXCR72MHC - Megatop prep table; stainless steel exterior

All Models Feature:

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (2 with brakes)
- Supplied with full set of clip-on divider bars and 4" deep plastic pans
- Expanded pan capacity compared to standard sandwich prep tables
- Supplied with 9" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | PANS (1/6) | ELECTRICAL |
|-----------|--|--|-----------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|------------|-------------------|
| MXCR29MHC | 28.9" x 34.5 x 43.2" (699 x 877 x 1098 mm) | 22.9" x 18.8" x 24.5" (602 x 478 x 622 mm) | 7 Cu Ft (198 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 220 lbs (100 kg) | R290a 3.0 oz (85 g) | 1 / 1 | 12 | 115V / 60Hz / 1Ph |
| MXCR48MHC | 48.2" x 34.5 x 43.2" (1225 x 877 x 1098 mm) | 43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 304 lbs (140 kg) | R-290a 3.17 oz (90 g) | 2 / 2 | 18 | 115V / 60Hz / 1Ph |
| MXCR60MHC | 61.2" x 34.5 x 43.2" (1555 x 877 x 1098 mm) | 56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm) | 15.5 Cu Ft (439 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 352 lbs (160 kg) | R-290a 3.17 oz (90 g) | 2 / 2 | 24 | 115V / 60Hz / 1Ph |
| MXCR72MHC | 71.7" x 34.5 x 43.2" (1822 x 877 x 1098 mm) | 66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm) | 18 Cu Ft (510 L) | 33°F to 41°F (1°C to 5°C) | 4.3A | 430 lbs (195 kg) | R-290a 3.35 oz (95 g) | 3 / 3 | 27 | 115V / 60Hz / 1Ph |



MXCPP50HC
47.4"W x 33"D x 41.7"H



MXCPP70HC
70.8"W x 33"D x 41.7"H



MXCPP92HC
94.2"W x 33"D x 41.7"H

Models:

MXCPP50HC - Pizza prep table; stainless steel exterior

MXCPP70HC - Pizza prep table; stainless steel exterior

MXCPP92HC - Pizza prep table; stainless steel exterior

All Models Feature:

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Supplied with four (4) 3" swivel casters (2 with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans (can accommodate up to 6" deep pans)
- Supplied with 17.75" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Supplied with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans



| MODEL | EXTERNAL DIMENSIONS | INTERNAL CABINET DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / SHELVES | PANS (1/3) | ELECTRICAL |
|-----------|--|---|---------------------|------------------------------|----------|---------------------|-----------------------------|-----------------|------------|-------------------|
| MXCPP50HC | 47.4" x 33 x 41.7" (1212 x 838 x 1059 mm) | 26" x 27.75" x 24" (660 x 705 x 610 mm) | 12 Cu Ft (340 L) | 33°F to 41°F (1°C to 5°C) | 5.0A | 348 lbs (158 kg) | R-290a 3.7 oz (105 g) | 1 / 1 | 6 | 115V / 60Hz / 1Ph |
| MXCPP70HC | 70.8" x 33 x 41.7" (1798 x 838 x 1059 mm) | 49.5" x 27.75" x 24" (1257 x 705 x 610 mm) | 22 Cu Ft (623 L) | 33°F to 41°F (1°C to 5°C) | 5.0A | 432 lbs (196 kg) | R-290a 3.7 oz (105 g) | 2 / 2 | 9 | 115V / 60Hz / 1Ph |
| MXCPP92HC | 94.2" x 33 x 41.7" (2393 x 838 x 1059 mm) | 73" x 27.75" x 24" (1854 x 705 x 610 mm) | 32 Cu Ft (906 L) | 33°F to 41°F (1°C to 5°C) | 5.5A | 582 lbs (264 kg) | R-290a 3.7 oz (105 g) | 3 / 3 | 12 | 115V / 60Hz / 1Ph |



MXSPP50HC
47"W x 34.6"D x 42"H



MXSPP70HC
71"W x 34.6"D x 42"H



MXSPP92HC
94"W x 34.6"D x 42"H

Models:

MXSPP50HC - Pizza prep table; stainless steel exterior

MXSPP70HC - Pizza prep table; stainless steel exterior

MXSPP92HC - Pizza prep table; stainless steel exterior

All Models Feature:

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Coated aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Supplied with four (4) 6" swivel casters (2 with brakes)
- Equipped with full set of plastic pans
- Standard recessed door handles
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Front-accessed utility compartment for easy maintenance & effective air movement to properly cool the condensing unit
- Easily replaceable dart-style magnetic compression gaskets



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | UNIT WEIGHT | REFRIGERANT | PAN CAPACITY 1/3 (1/6) | DOORS / SHELVES | ELECTRICAL |
|-----------|---|--|--------------------------|------------------------------|----------|---------------------|-------------|------------------------|-----------------|-------------------|
| MXSPP50HC | 47" x 34.6" x 42" (1200 x 880 x 1068 mm) | 25.6" x 27.8" x 26.5" (650 x 707 x 672 mm) | 10.9 Cu Ft (310 L) | 33°F to 41°F (1°C to 5°C) | 4A | 201 lbs (91 kg) | R-290a | 6 (12) | 1 / 1 | 115V / 60Hz / 1Ph |
| MXSPP70HC | 71" x 34.6" x 42" (1795 x 880 x 1068 mm) | 49" x 27.8" x 26.5" (1245 x 707 x 672 mm) | 20.9 Cu Ft (592 L) | 33°F to 41°F (1°C to 5°C) | 5.8A | 342 lbs (155 kg) | R-290a | 9 (18) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXSPP92HC | 94" x 34.6" x 42" (2390 x 880 x 1068 mm) | 72.4" x 27.8" x 26.5" (1840 x 707 x 672 mm) | 30.9 Cu Ft (874 L) | 33°F to 41°F (1°C to 5°C) | 5.8A | 485 lbs (220 kg) | R-290a | 12 (24) | 3 / 3 | 115V / 60Hz / 1Ph |



 **MAXX COLD**
X-series

CHEF BASES

Maxx Cold Chef Bases help to optimize your space and keep key ingredients close at hand. Our chef bases offer plenty of storage and when paired with a countertop grill or work surface are part of an efficient kitchen work station



MXCB48HC
50"W x 31.9"D x 26"H



MXCB60HC
62"W x 31.9"D x 26"H



MXCB72HC
74"W x 31.9"D x 26"H

Models:

MXCB48HC - Chef base; stainless steel exterior

MXCB60HC - Chef base; stainless steel exterior

MXCB72HC - Chef base; stainless steel exterior

All Models Feature:

- Constructed of stainless steel
- Easy to grip recessed door handles
- Full extension, heavy-duty drawer slides
- Supplied with four (4) 5" swivel casters (two with brakes)
- Drawer depth 7.9" (200 mm), can accommodate 4" deep pans
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system



| MODEL | EXTERNAL DIMENSIONS | INTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DRAWERS | ELECTRICAL |
|----------|--|---|--------------------------|------------------------------|----------|---------------------|-----------------------------|---------|-------------------|
| MXCB48HC | 50" x 31.9" x 26" (1270 x 810 x 660 mm) | 27.8" x 25.2" x 13.9" (707 x 639 x 353 mm) | 6.5 Cu Ft (184 L) | 33°F to 41°F (1°C to 5°C) | 2.1A | 260 lbs (118 kg) | R290a 2.82 oz (80 g) | 2 | 115V / 60Hz / 1Ph |
| MXCB60HC | 62" x 31.9" x 26" (1576 x 810 x 660 mm) | 40" x 25.2" x 13.9" (1017 x 639 x 353 mm) | 8.8 Cu Ft (249 L) | 33°F to 41°F (1°C to 5°C) | 2.1A | 302 lbs (137 kg) | R-290a 2.82 oz (80 g) | 2 | 115V / 60Hz / 1Ph |
| MXCB72HC | 74" x 31.9" x 26" (1880 x 810 x 660 mm) | 52" x 25.2" x 13.9" (1320 x 639 x 353 mm) | 11.1 Cu Ft (314 L) | 33°F to 41°F (1°C to 5°C) | 2.1A | 353 lbs (160 kg) | R-290a 2.82 oz (80 g) | 4 | 115V / 60Hz / 1Ph |



MAXX COLD *X-series*

MILK COOLERS

Maxx Cold Milk Coolers are perfect for any school lunchroom, university dining hall or cafeteria dining setting. Our milk coolers are available in three models, holding up to 16 milk crates, providing quick, easy access.



MXMC34HC
34"W x 30.6"D x 42"H



MXMC49HC
49"W x 30.6"D x 42"H



MXMC58HC
58"W x 30.6"D x 42"H

Models:

MXMC34HC - Milk cooler; stainless steel exterior

MXMC49HC - Milk cooler; stainless steel exterior

MXMC58HC - Milk cooler; stainless steel exterior

All Models Feature:

- All stainless steel construction
- Supplied with four 4" swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Urethane foam insulated walls and door
- Accommodates standard 13" x 13" x 11" or 19" x 13" x 11" crates



| MODEL | EXTERNAL DIMENSIONS | CAPACITY (13" X 13" X 11" CRATES) | CAPACITY (19" X 13" X 11" CRATES) | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|----------|---|-----------------------------------|-----------------------------------|------------------------------|----------|---------------------|-----------------------------|-------------------|
| MXMC34HC | 34" x 30.6" x 42" (865 x 777 x 1067 mm) | 8 | 4 | 36°F to 38°F (2°C to 3°C) | 3.0A | 220 lbs (100 kg) | R-290a 3.17 oz (90 g) | 115V / 60Hz / 1Ph |
| MXMC49HC | 49" x 30.6" x 42" (1245 x 777 x 1067 mm) | 12 | 8 | 36°F to 38°F (2°C to 3°C) | 3.0A | 304 lbs (140 kg) | R-290a 3.17 oz (90 g) | 115V / 60Hz / 1Ph |
| MXMC58HC | 58" x 30.6" x 42" (1475 x 777 x 1067 mm) | 16 | 10 | 36°F to 38°F (2°C to 3°C) | 3.0A | 430 lbs (195 kg) | R-290a 3.17 oz (90 g) | 115V / 60Hz / 1Ph |



 **MAXX COLD**
X-series

BOTTLE COOLERS AND BEER TOWER DISPENSERS

A benefit to any entertainment establishment, bar or restaurant, serve your customers cold, refreshing beverages with Maxx Cold Bottle Coolers. Maxx Cold Back Bar Coolers provide plenty storage, accurate temperature control and easy access. Maxx Cold Beer Towers are ideal for cold beer dispensing, and are available in multiple sizes to suit any application.



MXCR50BHC
49.4"W x 27"D x 35"H



MXCR65BHC
64.3"W x 27"D x 35"H

Models:

MXCR50BHC - Bottle cooler; black painted steel and stainless steel exterior

MXCR65BHC - Bottle cooler; black painted steel and stainless steel exterior

All Models Feature:

- Reinforced heavy-duty crossbar can support heavy loads without breaking
- External built-in bottle opener and bottle cap catcher
- Rear stainless steel top with marine edge for storing glasses, garnishes/condiments, etc.
- Supplied with two (2) sliding lids for easy access
- Rounded internal edges for easy cleaning
- LED lighting: Bright, long lasting and energy efficient
- Forced air cooling for high efficiency, rapid product cooling and reliable, consistent temperature control
- Uses an environmentally friendly, high r-value, efficient foam insulation to provide years of reliable, cost effective operation
- Designed with sturdy 1" rollers



| MODEL | EXTERIOR DIMENSIONS | NET CAPACITY | CAN / BOTTLE CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | LIDS / DIVIDERS | ELECTRICAL |
|----------|--|---------------------|-------------------------|------------------------------|----------|------------------|-----------------------------|-----------------|-------------------|
| MXCR50HC | 49.4" x 27" x 35" (1255 x 686 x 889 mm) | 14 Cu Ft (396 L) | 504 Cans 336 Bottles | 33°F to 41°F (1°C to 5°C) | 3A | 205 lb 93 kg | R-600a 2.47 oz (70 g) | 2 / 2 | 115V / 60Hz / 1Ph |
| MXCR65HC | 64.3" x 27" x 35" (1633 x 686 x 889 mm) | 17 Cu Ft (481 L) | 768 Cans 504 Bottles | 33°F to 41°F (1°C to 5°C) | 3A | 280 lb 128 kg | R-600a 3.17 oz (90 g) | 2 / 2 | 115V / 60Hz / 1Ph |



MXBD24-1BHC
23.3"W x 29.9"D x 51.7"H

MXBD48-1BHC
47.5"W x 24.4"D x 56"H

MXBD60-1BHC
61.06"W x 24.4"D x 56"H

MXBD24-1SHC
23.3"W x 29.9"D x 51.7"H

MXBD48-1SHC
47.5"W x 24.4"D x 56"H

MXBD60-1SHC
61.06"W x 24.4"D x 56"H

Models:

MXBD24-1BHC - Beer tower dispenser; black coated steel exterior

MXBD48-1BHC - Beer tower dispenser; black coated steel exterior

MXBD60-1BHC - Beer tower dispenser; black coated steel exterior

Stainless Steel Models:

MXBD24-1SHC - Beer tower dispenser; stainless steel exterior

MXBD48-1SHC - Beer tower dispenser; stainless steel exterior

MXBD60-1SHC - Beer tower dispenser; stainless steel exterior

All Models Feature:

- Constructed of powder-coated steel exterior (black) and interior (white)
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system

All Models Feature:

- Constructed of stainless steel exterior and white powder-coated interior
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system



| MODEL | EXTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / TOWERS / TAP FAUCETS | ELECTRICAL |
|-------------|---|-----------------------|------------------------------|----------|---------------------|-----------------------------|------------------------------|-------------------|
| MXBD24-1BHC | 23.3" x 29.9" x 51.65" (592 x 760 x 1312 mm) | 7.2 Cu Ft (204 L) | 33°F to 41°F (1°C to 5°C) | 2.2A | 161 lbs (73 kg) | R-600a 2.82 oz (80 g) | 1 / 1 / 1 | 115V / 60Hz / 1Ph |
| MXBD48-1BHC | 47.5" x 24.4" x 56" (1205 x 620 x 1422 mm) | 10.5 Cu Ft (297 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 264 lbs (120 kg) | R-290a 3.88 oz (110 g) | 2 / 1 / 2 | 115V / 60Hz / 1Ph |
| MXBD60-1BHC | 61.06" x 24.4" x 56" (1247 x 620 x 1422 mm) | 14.2 Cu Ft (402 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 302 lbs (137 kg) | R-290a 3.88 oz (110 g) | 2 / 1 / 2 | 115V / 60Hz / 1Ph |
| MXBD24-1SHC | 23.3" x 29.9" x 51.65" (592 x 760 x 1312 mm) | 7.2 Cu Ft (204 L) | 33°F to 41°F (1°C to 5°C) | 2.2A | 161 lbs (73 kg) | R-600a 2.82 oz (80 g) | 1 / 1 / 1 | 115V / 60Hz / 1Ph |
| MXBD48-1SHC | 47.5" x 24.4" x 56" (1205 x 620 x 1422 mm) | 10.5 Cu Ft (297 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 264 lbs (120 kg) | R-290a 3.88 oz (110 g) | 2 / 1 / 2 | 115V / 60Hz / 1Ph |
| MXBD60-1SHC | 61.06" x 24.4" x 56" (1247 x 620 x 1422 mm) | 14.2 Cu Ft (402 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 302 lbs (137 kg) | R-290a 3.88 oz (110 g) | 2 / 1 / 2 | 115V / 60Hz / 1Ph |



MXBD48-2BHC
47.5"W x 24.4"D x 56"H

MXBD60-2BHC
61.06"W x 24.4"D x 56"H

MXBD72-2BHC
61.06"W x 24.4"D x 56"H

MXBD48-2SHC
47.5"W x 24.4"D x 56"H

MXBD60-2SHC
61.06"W x 24.4"D x 56"H

MXBD72-2SHC
61.06"W x 24.4"D x 56"H

Models:

MXBD48-2BHC - Beer tower dispenser; black coated steel exterior

MXBD60-2BHC - Beer tower dispenser; black coated steel exterior

MXBD72-2BHC - Beer tower dispenser; black coated steel exterior

Stainless Steel Models:

MXBD48-2SHC - Beer tower dispenser; stainless steel exterior

MXBD60-2SHC - Beer tower dispenser; stainless steel exterior

MXBD72-2SHC - Beer tower dispenser; stainless steel exterior

All Models Feature:

- Constructed of powder-coated steel exterior (black) and interior (white)
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) or six (6) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system

All Models Feature:

- Constructed of stainless steel exterior and white powder-coated interior
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) or six (6) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system



| MODEL | EXTERNAL DIMENSIONS | NET CAPACITY | HOLDING TEMPERATURE RANGE | AMP DRAW | SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | DOORS / TOWERS / TAP FAUCETS | ELECTRICAL |
|-------------|--|-----------------------|------------------------------|----------|---------------------|-----------------------------|------------------------------|-------------------|
| MXBD48-2BHC | 47.5" x 24.4" x 56" (1205 x 620 x 1422 mm) | 10.5 Cu Ft (297 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 267 lbs (121 kg) | R-290a 3.88 oz (110 g) | 2 / 2 / 2 | 115V / 60Hz / 1Ph |
| MXBD60-2BHC | 61.06" x 24.4" x 56" (1247 x 620 x 1422 mm) | 14.2 Cu Ft (402 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 304 lbs (138 kg) | R-290a 3.88 oz (110 g) | 2 / 2 / 2 | 115V / 60Hz / 1Ph |
| MXBD72-2BHC | 73.07" x 24.4" x 56" (1856 x 620 x 1422 mm) | 17.3 Cu Ft (490 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 351 lbs (159 kg) | R-290a 4.59 oz (130 g) | 3 / 2 / 4 | 115V / 60Hz / 1Ph |
| MXBD48-2SHC | 47.5" x 24.4" x 56" (1205 x 620 x 1422 mm) | 10.5 Cu Ft (297 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 267 lbs (121 kg) | R-290a 3.88 oz (110 g) | 2 / 2 / 2 | 115V / 60Hz / 1Ph |
| MXBD60-2SHC | 61.06" x 24.4" x 56" (1247 x 620 x 1422 mm) | 14.2 Cu Ft (402 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 304 lbs (138 kg) | R-290a 3.88 oz (110 g) | 2 / 2 / 2 | 115V / 60Hz / 1Ph |
| MXBD72-2SHC | 73.07" x 24.4" x 56" (1856 x 620 x 1422 mm) | 17.3 Cu Ft (490 L) | 33°F to 41°F (1°C to 5°C) | 3.0A | 351 lbs (159 kg) | R-290a 4.59 oz (130 g) | 3 / 2 / 4 | 115V / 60Hz / 1Ph |



 **MAXX ICE**

SELF-CONTAINED & MODULAR ICE MACHINES

Maxx Ice units are engineered with a vertical evaporator you can depend on for reliable ice production and constructed of durable stainless steel for food service, entertainment, and hospitality environments.



MIM50 / MIM50P
14.6"W x 25"D x 33.3"H



MIM50V
14.6"W x 23.4"D x 33.3"H



MIM50-O
14.6"W x 25"D x 33.3"H



MIM50P-O
14.6"W x 25"D x 33.3"H

Models:

MIM50 / MIM50P - Indoor / Premium Indoor Ice Machine; stainless steel door, black cabinet

Model:

MIM50V - Indoor Ice Machine; black door, black cabinet

Models:

MIM50-O - Indoor / Outdoor Ice Machine; stainless steel exterior

Models:

MIM50P-O - Premium Outdoor Ice Machine; stainless steel exterior

Features:

- Ideal for residential and commercial applications
- Produces up to 65 lbs (29.5 kg) of ice daily
- Storage capacity: 25 lbs (11 kg)
- Solid state controls
- Self-cleaning mode
- Air-cooled compressor



| MODEL # | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (MAKING / HARVESTING) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|----------|---|-----------------------------------|---------------------------------------|-----------------------------|-------------------|
| MIM50 | 60 lbs (27.2 kg) | 3A / 3.6A | 84 lbs (38 kg) 93 lbs (42 kg) | R-134a 3.88 oz (110 g) | 115V / 60Hz / 1Ph |
| MIM50V | 50 lbs (22.7 kg) | 3A / 4A | 84 lbs (38 kg) 93 lbs (42 kg) | R-134a 3.88 oz (110 g) | 115V / 60Hz / 1Ph |
| MIM50P | 65 lbs (29.5 kg) | 3A / 4A | 92 lbs (41.7 kg) 101 lbs (45.8 kg) | R-134a 3.88 oz (110 g) | 115V / 60Hz / 1Ph |
| MIM50P-O | 65 lbs (29.5 kg) | 3A / 4A | 92 lbs (41.7 kg) 101 lbs (45.8 kg) | R-134a 3.88 oz (110 g) | 115V / 60Hz / 1Ph |
| MIM50-O | 60 lbs (27.2 kg) | 3A / 4A | 83 lbs (37 kg) 93 lbs (42 kg) | R-134a 3.88 oz (110 g) | 115V / 60Hz / 1Ph |



MIM75
16.7"W x 21"D x 32.7"H



MIM100 / MIM130
22"W x 21"D x 32.7"H



MIM85H
16.7"W x 21"D x 32.7"H



MIM120 / MIM125H
22"W x 21"D x 32.7"H



MIM250
24"W x 24"D x 38.6"H



MIM265H
24"W x 24"D x 38.6"H

Models:

MIM75 / MIM100 / MIM130 - Indoor Ice Machine; stainless steel exterior, black door & trim

- Produces up to:
MIM75: 75 lbs (34 kg) of ice cubes daily
MIM100: 110 lbs (50 kg) of ice cubes daily
MIM130: 130 lbs (59 kg) of ice cubes daily



Bullet Cube

- Storage capacity:
MIM75: 25 lbs (11 kg)
MIM100 / MIM130: 35 lbs (15.9 kg)

Model:

MIM85H / MIM120 / MIM125H - Indoor Ice Machine; stainless steel exterior, black door & trim

- Produces up to:
MIM85H: 88 lbs (40 kg) of ice cubes daily
MIM120: 120 lbs (54.4 kg) of ice cubes daily
MIM125H: 125 lbs (56.7 kg) of ice cubes daily



Full Dice Cube



Half Dice Cube

- Storage capacity:
MIM85H: 25 lbs (11 kg)
MIM120 / MIM125H: 35 lbs (15.9 kg)

Models:

MIM250 / MIM265H - Indoor Ice Machine; stainless steel exterior, black door & trim

- Produces up to:
MIM250: 260 lbs (118 kg) of ice cubes daily
MIM265H: 265 lbs (120 kg) of ice cubes daily



Full Dice Cube



Half Dice Cube

- Storage capacity:
ALL MODELS: 75 lbs (34 kg)

All Models Feature:

- Exterior is constructed of stainless steel and black trim
- Front breathing design
- Air-cooled compressor



| MODEL # | ICE TYPE | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (NOMINAL / MAX) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|---------|-----------|--|--------------------------|--------------------------------------|-----------------------------|-------------------|
| MIM75 | Bullet | 75 lbs (34 kg) | 6.7A / 11.2A | 93 lbs (42 kg) 104 lbs (47 kg) | R-134a 6.35 oz (180 g) | 115V / 60Hz / 1Ph |
| MIM100 | Bullet | 110 lbs (50 kg) | 7.3A / 11.7A | 106 lbs (48 kg) 125 lbs (57 kg) | R-134a 9.17oz (260 g) | 115V / 60Hz / 1Ph |
| MIM130 | Bullet | 130 lbs (59 kg) | 7.5A / 11.8A | 106 lbs (48 kg) 129 lbs (58.5 kg) | R-134a 9.17 oz (260 g) | 115V / 60Hz / 1Ph |
| MIM120 | Full Dice | 120 lbs (54.4 kg) | 7.5A / 11.8A | 110 lbs (50 kg) 129 lbs (58.5 kg) | R-134a 8.47oz (240 g) | 115V / 60Hz / 1Ph |
| MIM85H | Half Dice | 88 lbs (40 kg) | 3.8A / 4.7A | 93 lbs (42 kg) 104 lbs (47 kg) | R-134a 4.66 oz (132 g) | 115V / 60Hz / 1Ph |
| MIM125H | Half Dice | 125 lbs (56.7 kg) | 7.5A / 11.8A | 110 lbs (50 kg) 129 lbs (58.5 kg) | R-134a 8.47oz (240 g) | 115V / 60Hz / 1Ph |
| MIM250 | Full Dice | 260 lbs (118 kg) | 9.2A / 12A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-134a 22.9 oz (649 g) | 115V / 60Hz / 1Ph |
| MIM265H | Half Dice | 265 lbs (120 kg) | 9.2A / 12A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-134a 22.9 oz (649 g) | 115V / 60Hz / 1Ph |



MIM452
30"W x 24"D x 21"H



MIM600
30"W x 24"D x 21"H



MIM1000
30"W x 24"D x 26.63"H

**Models Shown on a MIB400 storage bin - sold separately*

Model:

MIM452 - Modular Ice Machine; stainless steel exterior

- Produces up to 460 lbs (209 kg) of ice daily



Full Dice Cube

Model:

MIM600 - Modular Ice Machine; stainless steel exterior

- Produces up to 602 lbs (275 kg) of ice daily



Full Dice Cube

Model:

MIM1000 - Modular Ice Machine; stainless steel exterior

- Produces up to 1000 lbs (454 kg) of ice daily



Full Dice Cube

All Models Feature:

- 30" models can be stacked with addition of an adapter
- Compatible ice storage bin sold separately
- Exterior is constructed of stainless steel
- Automatic cleaning cycle and bin overflow prevention



| MODEL # | ICE TYPE | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (NOMINAL / MAX) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|---------|-----------|---|-----------------------------|--------------------------------------|-----------------------------|-------------------|
| MIM452 | Full Dice | 460 lbs (209 kg) | 12.4A / 15.3A | 130 lbs (59 kg) 148 lbs (67 kg) | R-404a 24.5 oz (659 g) | 115V / 60Hz / 1Ph |
| MIM600 | Full Dice | 602 lbs (275 kg) | 7.60A / 9.85A | 110 lbs (50 kg) 129 lbs (58.5 kg) | R-404a 45.8 oz (1298 g) | 230V / 60Hz / 1Ph |
| MIM1000 | Full Dice | 1000 lbs (454 kg) | 9.2A / 11.3A | 194 lbs (88 kg) 208 lbs (94 kg) | R-404a 57.9 oz (1641 g) | 230V / 60Hz / 1Ph |



MAXX ICE

INTELLIGENT SERIES SELF-CONTAINED & MODULAR ICE MACHINES

Experience Intelligent Series Ice Machines by Maxx Ice, innovation with you in mind. Energy Star rated, Intelligent Series Ice Machines are designed to be energy efficient and available in both self-contained and modular units producing full dice and half dice cubes.

[Watch our Intelligent Series Ice Machine Video](#)





MIM150N / MIM150NH
24"W x 24"D x 39"H



MIM200N / MIM200NH
24"W x 24"D x 39"H



MIM260N / MIM260NH
24"W x 24"D x 39"H



MIM320N / MIM320NH
30"W x 28"D x 39"H

Models:

MIM150N / MIM150NH - Self-contained Ice Machine; stainless steel exterior, black trim

- Produces up to 152 lbs (69 kg) of ice daily

- Full Dice Cube
- Half Dice Cube

Models:

MIM200N / MIM200NH - Self-contained Ice Machine; stainless steel exterior, black trim

- Produces up to 199 lbs (90 kg) of ice daily

- Full Dice Cube
- Half Dice Cube

Models:

MIM260N / MIM260NH - Self-contained Ice Machine; stainless steel exterior, black trim

- Produces up to 265 lbs (120 kg) of ice daily

- Full Dice Cube
- Half Dice Cube

Models:

MIM320N / MIM320NH - Self-contained Ice Machine; stainless steel exterior, black trim

- Produces up to 328 lbs (148 kg) of ice daily

- Full Dice Cube
- Half Dice Cube

All Models Feature:

- Storage capacity: 75 lbs (34 kg)
- Air-cooled compressor
- Antimicrobial agent within storage bin liner for improved sanitation
- Programmable, user-friendly digital controls
- Automatic cleaning cycle and bin overflow prevention



| MODEL # | ICE TYPE | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (NOMINAL / MAX) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|----------|-----------|--|--------------------------|--------------------------------------|-----------------------------|-------------------|
| MIM150N | Full Dice | 152 lbs (69 kg) | 5.2A / 6.4A | 139 lbs (63 kg) 155 lbs (70.5 kg) | R-134a 7 oz (198 g) | 115V / 60Hz / 1Ph |
| MIM150NH | Half Dice | 152 lbs (69 kg) | 5.2A / 6.4A | 139 lbs (63 kg) 155 lbs (70.5 kg) | R-134a 7 oz (198 g) | 115V / 60Hz / 1Ph |
| MIM200N | Full Dice | 199 lbs (90 kg) | 7.1A / 7.4A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 8.11 oz (230 g) | 115V / 60Hz / 1Ph |
| MIM200NH | Half Dice | 199 lbs (90 kg) | 7.1A / 7.4A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 8.11 oz (230 g) | 115V / 60Hz / 1Ph |
| MIM260N | Full Dice | 265 lbs (120 kg) | 7.1A / 9.8A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 10.6 oz (300 g) | 115V / 60Hz / 1Ph |
| MIM260NH | Half Dice | 265 lbs (120 kg) | 7.1A / 9.8A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 10.6 oz (300 g) | 115V / 60Hz / 1Ph |
| MIM320N | Full Dice | 328 lbs (148 kg) | 8A / 9A | 148 lbs (67 kg) 164 lbs (74.4 kg) | R-404a 12.5 oz (354 g) | 115V / 60Hz / 1Ph |
| MIM320NH | Half Dice | 328 lbs (148 kg) | 8A / 9A | 148 lbs (67 kg) 164 lbs (74.4 kg) | R-404a 12.5 oz (354 g) | 115V / 60Hz / 1Ph |



MIM360N* / MIM360NH*
22"W x 24.6"D x 21"H



MIM370N* / MIM370NH*
30"W x 24.6"D x 21"H



MIM500N* / MIM500NH*
30"W x 24.6"D x 21"H



MIM650N / MIM650NH****
30"W x 24.6"D x 21"H



MIM1000N / MIM1000NH****
30"W x 24.6"D x 26.7"H

*Models Shown on MIB310N/470N storage bin - sold separately

**Models Shown on MIB470N storage bin - sold separately

22" Models:

MIM360N / MIM360NH - Modular Ice Machine; stainless steel exterior, black trim

- Produces up to:
MIM360N: 373 lbs (169 kg) of ice daily
 Full Dice Cube
MIM360NH: 265 lbs (120 kg) of ice daily
 Half Dice Cube
- Ideal for drink dispensers

30" Models:

MIM370N / MIM370NH - Modular Ice Machine; stainless steel exterior, black trim

- Produces up to:
MIM370N: 373 lbs (169 kg) of ice daily
 Full Dice Cube
MIM370NH: 361 lbs (164 kg) of ice daily
 Half Dice Cube

30" Models:

MIM500N / MIM500NH - Modular Ice Machine; stainless steel exterior, black trim

- Produces up to:
MIM500N: 521 lbs (236 kg) of ice daily
 Full Dice Cube
MIM500NH: 513 lbs (233 kg) of ice daily
 Half Dice Cube

30" Models:

MIM650N / MIM650NH - Modular Ice Machine; stainless steel exterior, black trim

- Produces up to:
MIM650N: 650 lbs (295 kg) of ice daily
 Full Dice Cube
MIM650NH: 645 lbs (292 kg) of ice daily
 Half Dice Cube

30" Models:

MIM1000N / MIM1000NH - Modular Ice Machine; stainless steel exterior, black trim

- Produces up to:
MIM1000N: 937 lbs (425 kg) of ice daily
 Full Dice Cube
MIM1000NH: 1005 lbs (456 kg) of ice daily
 Half Dice Cube

All Models Feature:

- Can be stacked with the addition of an adapter
- Hinged front panel allows for easy access and service
- User friendly, exterior diagnostic digital controller display
- Compatible ice storage bins MIB310N, MIB470N or MIB580N sold separately



| MODEL # | ICE TYPE | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (NOMINAL / MAX) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|-----------|-----------|--|--------------------------|---------------------------------------|-----------------------------|-------------------|
| MIM360N | Full Dice | 373 lbs (169 kg) | 7.1A / 9.8A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 10.6 oz (300 g) | 115V / 60Hz / 1Ph |
| MIM360NH | Half Dice | 361 lbs (120 kg) | 7.1A / 9.8A | 144 lbs (65 kg) 160 lbs (72.5 kg) | R-404a 10.6 oz (300 g) | 115V / 60Hz / 1Ph |
| MIM370N | Full Dice | 373 lbs (169 kg) | 7.5A / 10.5A | 93 lbs (42 kg) 111.5 lbs (50.5 kg) | R-404a 24.5 oz (695 g) | 115V / 60Hz / 1Ph |
| MIM370NH | Half Dice | 361 lbs (164 kg) | 7.5A / 10.5A | 93 lbs (42 kg) 111.5 lbs (50.5 kg) | R-404a 24.5 oz (695 g) | 115V / 60Hz / 1Ph |
| MIM500N | Full Dice | 521 lbs (236 kg) | 7A / 9.3A | 130 lbs (59 kg) 148 lbs (67 kg) | R-404a 24.5 oz (695 g) | 115V / 60Hz / 1Ph |
| MIM500NH | Half Dice | 513 lbs (233 kg) | 7A / 9.3A | 130 lbs (59 kg) 148 lbs (67 kg) | R-404a 24.5 oz (695 g) | 115V / 60Hz / 1Ph |
| MIM650N | Full Dice | 650 lbs (295 kg) | 7.1A / 8A | 155 lbs (70 kg) 165 lbs (75 kg) | R-404a 43 oz (1219 g) | 230V / 60Hz / 1Ph |
| MIM650NH | Half Dice | 645 lbs (292 kg) | 7.1A / 8A | 155 lbs (70 kg) 165 lbs (75 kg) | R-404a 43 oz (1219 g) | 230V / 60Hz / 1Ph |
| MIM1000N | Full Dice | 937 lbs (425 kg) | 10A / 11.1A | 194 lbs (88 kg) 208 lbs (94 kg) | R-404a 57.14 oz (1620 g) | 230V / 60Hz / 1Ph |
| MIM1000NH | Half Dice | 1005 lbs (456 kg) | 10A / 11.1A | 194 lbs (88 kg) 208 lbs (94 kg) | R-404a 57.14 oz (1620 g) | 230V / 60Hz / 1Ph |



 **MAXX ICE**

MARINE ICE MACHINES

Maxx Ice Compact Marine Ice Machines produce individual long crescent shaped cubes and produce up to 25 lbs of ice per day. The refrigerated ice storage compartment inhibits ice from melting and will hold up to 12 lbs.

The units are available in stainless steel, white and black exterior finishes. Built for marine applications, the MMAR25 model is suitable for free-standing or built-in installation and is available with a removable flange. The units are easy to install because a drain connection is not required.





MMAR25B
14"W x 17.2"D x 24.5"H



MMAR25S
14"W x 17.2"D x 24.5"H



MMAR25W
14"W x 17.2"D x 24.5"H

Model:
MMAR25B - Black painted steel exterior

Model:
MMAR25S - Stainless steel exterior

Model:
MMAR25W - White painted steel exterior

Features:

- Produces up to 25.1 lbs (11.4 kg) of ice daily
- Storage capacity: 12 lbs (11 kg)
- Automatic shut-off when bin is full
- Refrigerated storage compartment to inhibit ice melt
- Travel latch keeps closed during at-sea travel
- Door prop allows for air-drying inside of unit when powered off
- Designed for free-standing or built-in applications
- Available in 220V/50Hz/1Ph and 60Hz

Long Crescent Cube



| MODEL # | DAILY ICE PRODUCTION (70°F AIR / 50°F WATER) | AMP DRAW (MAKING / HARVESTING) | NET WEIGHT / SHIPPING WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|---------|---|-----------------------------------|----------------------------------|-----------------------------|-------------------|
| MMAR25B | 25.1 lbs (11.4 kg) | 1.8A / 1.5A | 51 lbs (23 kg) 60 lbs (27 kg) | R-134a 1.98 oz (56 g) | 115V / 60Hz / 1Ph |
| MMAR25S | 25.1 lbs (11.4 kg) | 1.8A / 1.5A | 51 lbs (23 kg) 60 lbs (27 kg) | R-134a 1.98 oz (56 g) | 115V / 60Hz / 1Ph |
| MMAR25W | 25.1 lbs (11.4 kg) | 1.8A / 1.5A | 51 lbs (23 kg) 60 lbs (27 kg) | R-134a 1.98 oz (56 g) | 115V / 60Hz / 1Ph |



MAXX ICE

ICE STORAGE BINS

Ice Storage Bins are constructed of stainless steel and are compatible with both 22" and 30" Modular Ice Machines.



MB310N

22"W x 34"D x 41.4"H

MIB470N

30"W x 34"D x 41.4"H

MIB580N

30"W x 34"D x 50"H

MIB400

30"W x 34"D x 37"H

MIB580

30"W x 34"D x 50"H

Model:

MIB310N - Ice Storage Bin; stainless steel exterior, black trim

Model:

MIB470N - Ice Storage Bin; stainless steel exterior, black trim

Model:

MIB580N - Ice Storage Bin; stainless steel exterior, black trim

Model:

MIB400 - Ice Storage Bin; stainless steel exterior

Model:

MIB580 - Ice Storage Bin; stainless steel exterior

Features:

- Storage capacity from 310 lbs (141 kg) to 580 lbs (263 kg)
- Exterior is constructed of durable stainless steel with black trim door
- LED illuminated bin interior when access door is open (powered by ice machine head)
- Polyethylene bin liner for improved sanitation
- Constructed of non-CFC polyurethane foamed in-place insulation
- 3/4" gravity drain is required



Features:

- Storage capacity from 400 lbs (213 kg) to 580 lbs (263 kg)
- Bin door and exterior are constructed of durable stainless steel
- Polyethylene bin liner for improved sanitation
- Constructed of non-CFC polyurethane foamed in-place insulation
- 3/4" gravity drain is required



| MODEL # | MAXIMUM ICE STORAGE CAPACITY | AHRI CAPACITY | SHIPPING WEIGHT | DRAIN LINE CONNECTION |
|------------------------------------|------------------------------|------------------|-------------------|-----------------------|
| MIB310N <i>Formerly MIB280N</i> | 310 lbs (141 kg) | 246 lbs (112 kg) | 99.5 lbs (45 kg) | 3/4" |
| MIB470N <i>Formerly MIB430N</i> | 470 lbs (213 kg) | 376 lbs (171 kg) | 117 lbs (53 kg) | 3/4" |
| MIB580N | 580 lbs (263 kg) | 464 lbs (210 kg) | 164 lbs (75 kg) | 3/4" |
| MIB400 | 400 lbs (213 kg) | 320 lbs (145 kg) | 112 lbs (50.8 kg) | 3/4" |
| MIB580 | 580 lbs (263 kg) | 464 lbs (210 kg) | 164 lbs (75 kg) | 3/4" |

| MODULAR ICE MACHINE MODEL # | MIB310N | MIB470N | MIB580N | MIB400 | MIB580 |
|-----------------------------|---------|---------|---------|--------|--------|
| MIM452 | | • | • | • | • |
| MIM600 | | • | • | • | • |
| MIM1000 | | • | • | • | • |
| MIM360N | • | | | | |
| MIM360NH | • | | | | |
| MIM370N | | • | • | • | • |
| MIM370NH | | • | • | • | • |
| MIM500N | | • | • | • | • |
| MIM500NH | | • | • | • | • |
| MIM650N | | • | • | • | • |
| MIM650NH | | • | • | • | • |
| MIM1000N | | • | • | • | • |
| MIM1000NH | | • | • | • | • |

**With adapter kit, sold separately*

WATER FILTERS



TLC-107096



TLC-107097



TLC-3200S
Replacement Cartridge

Models:

TLC-107096 - Single Head with Pressure Gauge

TLC-107097 - Double Head with Pressure Gauge

TLC-3200S - Replacement Cartridge

Features:

- Built-in scale inhibitor
- Gradient density carbon block filter
- Pressure gauge and relief valve
- Designed to minimize contamination during filter cartridge change outs

| MODEL # | MAXIMUM SERVICE FLOW RATE | FLITER LIFE | MICRON RATING | UNIT WEIGHT |
|------------|---------------------------|------------------------------------|---------------|-------------------|
| TLC-107096 | 2.1 GPM | 27,000 Gal (102,206 L) 6 Months | 0.5 | 2.75 lb (1.24 kg) |
| TLC-107097 | 4.2 GPM | 54,000 Gal (204,412 L) 6 Months | 0.5 | 6.25 lb (2.83 kg) |
| TLC-3200S | 2.1 GPM | 27,000 Gal (102,206 L) 6 Months | 0.5 | 2.5 lb (1.13 kg) |



MAXX ICE

COMPACT REFRIGERATION

Designed for both residential & commercial applications. Maxx Ice Compact Refrigerators are ideal for outdoor and indoor entertainment. Units can be built-in or free-standing and are designed to weather the elements when necessary while providing years of enjoyment with easy maintenance.



MCR3U
14.5"W x 23"D x 33.5"H



MCR3U-0
14.5"W x 23"D x 33.5"H



MCR5U-0
23.625"W x 23"D x 33.5"H

Model:

MCR3U - Indoor Refrigerator; stainless steel door, black cabinet

MCR3U-0 - Outdoor Refrigerator; stainless steel exterior

Features:

- Ideal for residential and commercial applications
- Storage capacity of 3 cubic ft. (85 L)
- Stainless steel field reversible door and handle
- Energy efficient LED interior lighting
- Free standing or built-in installation




Model:

MCR5U-0 - Indoor/Outdoor Refrigerator; stainless steel exterior

Features:

- Ideal for residential and commercial applications
- Storage capacity of 5 cubic ft. (142 L)
- Stainless steel door with lock and key set
- Energy efficient LED interior lighting
- Digital controls maintain optimum temperature

| MODEL # | HOLDING TEMPERATURE RANGE | AMP DRAW | DOORS / SHELVES | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|---------|------------------------------|----------|-----------------|------------------|-----------------------------|-------------------|
| MCR3U | 35°F to 40°F (1°C to 5°C) | 2.0A | 1 / 4 | 77 lbs (35 kg) | R-134a 2.3 oz (65.2 g) | 115V / 60Hz / 1Ph |
| MCR3U-0 | 35°F to 40°F (1°C to 5°C) | 2.0A | 1 / 4 | 67 lbs (30 kg) | R-134a 2.2 oz (65.2 g) | 115V / 60Hz / 1Ph |
| MCR5U-0 | 35°F to 40°F (1°C to 5°C) | 1.8A | 1 / 3 | 93 lbs (42.5 kg) | R-134a 2.2 oz (65.2 g) | 115V / 60Hz / 1Ph |

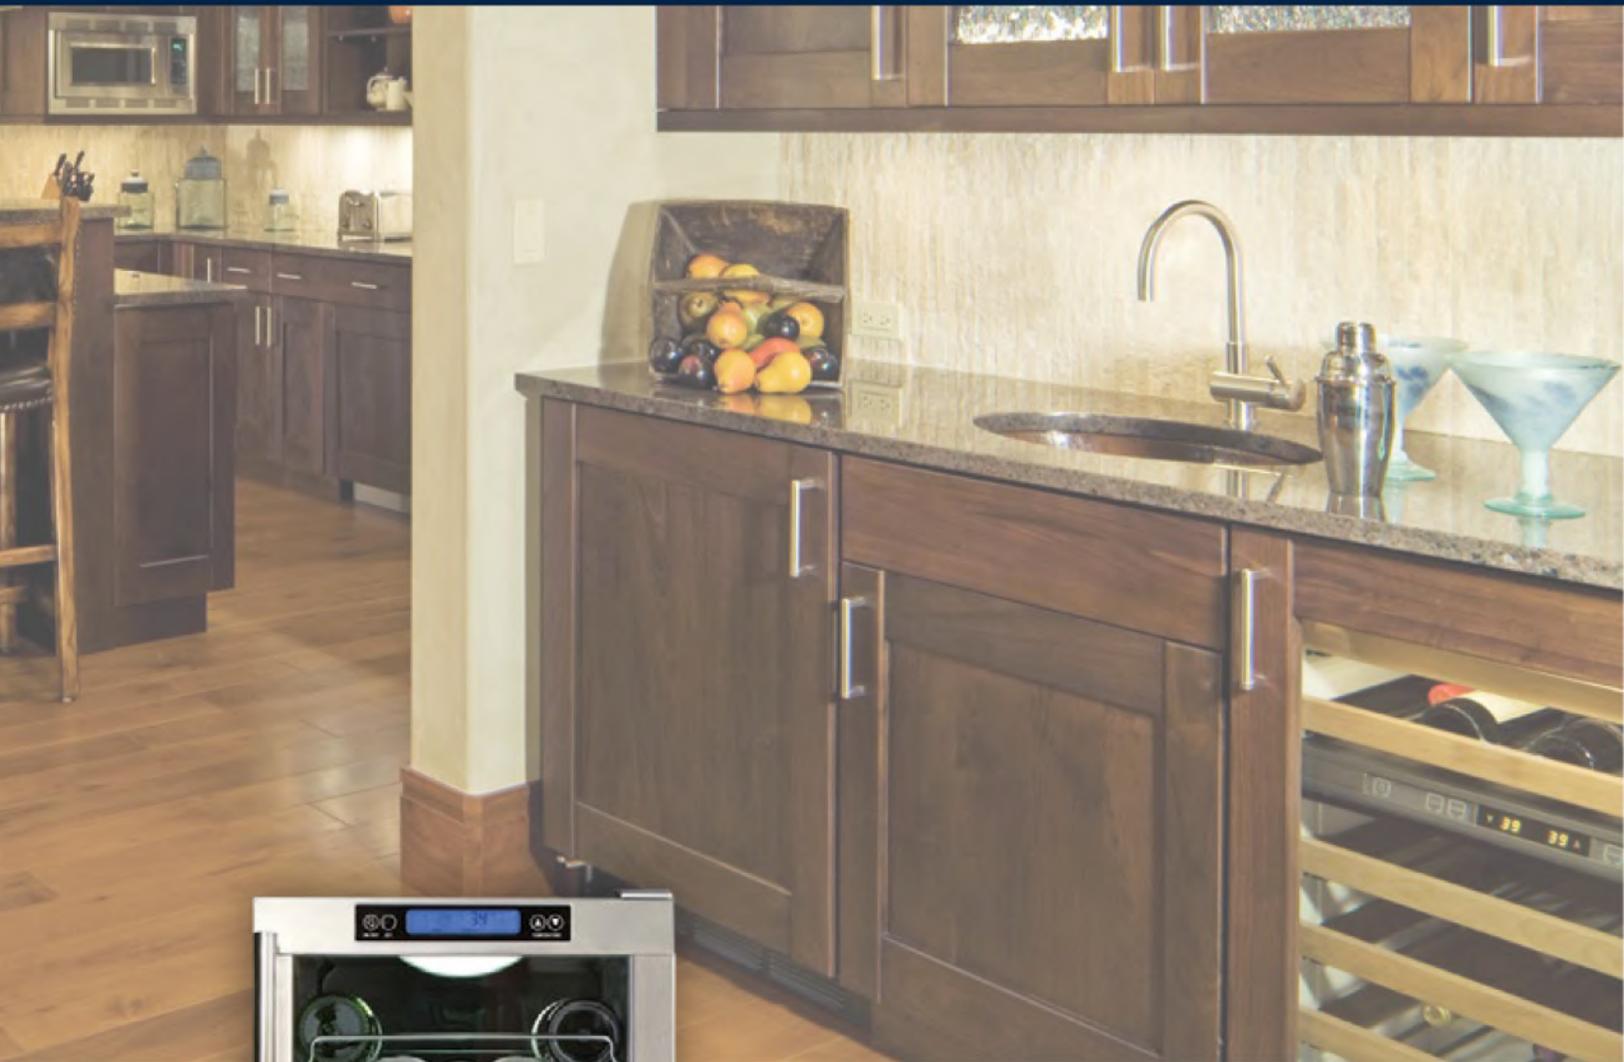

MAXX ICE

WINE COOLERS & BEVERAGE CENTERS

Maxx Ice Wine Coolers provide plenty of storage and accurate temperature to ensure your beverages taste good.

Our Beverage Centers are the perfect addition to any residential bar or kitchen application and can be installed outdoors.



MCWC28
14.5"W x 23"D x 33.5"H



MCBC3U
14.5"W x 23"D x 33.5"H

Model:

MCWC28 - Indoor Wine Cooler; black painted steel exterior

Features:

- Designed for residential and commercial applications
- Storage capacity of 3 cubic ft. (85 L)
- Interior LED lighting
- Electronic control panel with LCD digital display
- Multi-pane glass door with stainless steel handle



Model:

MCBC3U - Indoor Beverage Center; black painted steel exterior

Features:

- Ideal for residential and commercial applications
- Storage capacity of 3 cubic ft. (85 L)
- Multi-pane energy efficient glass door
- Energy efficient LED interior lighting
- Digital controls maintain optimum temperature

| MODEL # | HOLDING TEMPERATURE RANGE | AMP DRAW | BOTTLE RACKS / BOTTLE CAPACITY | UNIT WEIGHT | REFRIGERANT AND CHARGE SIZE | ELECTRICAL |
|---------|---------------------------|----------|--------------------------------|----------------|-----------------------------|-------------------|
| MCWC28 | 35°F to 40°F (1°C to 5°C) | 2.0A | 6 / 28 | 76 lbs (34 kg) | R-134a 2.3 oz (65.2 g) | 115V / 60Hz / 1Ph |
| MCBC3U | 35°F to 40°F (1°C to 5°C) | 2.0A | 1 / 4 | 77 lbs (35 kg) | R-134a 2.3 oz (65.2 g) | 115V / 60Hz / 1Ph |

SUPPORT & WARRANTY

Maxx Customer Support

3355 Enterprise Avenue, Suite 160
Fort Lauderdale, FL 33331
Tel: 954.202.7419
Fax: 954.202.7337
Office Hours: Monday - Friday 8:30am to 5:30pm EST

Orders:

Send orders to: Orders@TheLegacyCompanies.com

Technical Support (MaxxHelp):

TechnicalServices@TheLegacyCompanies.com

International Support:

Sales@GreenfieldWorldTrade.com

Parts:

Email: CustomerService@Partstown.com
Phone: (800) 438.8898
Web: www.partstown.com/maxx_cold/parts
Hours Available (EST) Monday - Friday 7:00am to 7:00pm

Maxx Warranty (USA / CANADA)

Contact Maxx for warranty statement at:
TechnicalServices@TheLegacyCompanies.com or 877.368.2797

 **MAXX COLD**
 **MAXX ICE**



A DIVISION OF
THE LEGACY COMPANIES

3355 Enterprise Avenue, Suite 160 | Fort Lauderdale, FL 33331
Tel: 954.202.7419 | Fax: 954.202.7337 | www.maxx-cold.com | www.maxx-ice.com

